

# ADDISON PRO

CCT selectable IP40 high output decorative bulkhead fitting



**APPLICATIONS**

- For commercial interior use in stairwells, corridors and communal areas

**SPECIFICATION**

- White polycarbonate base
- Opal polycarbonate diffuser
- Selectable CCT: 3000K, 4000K, 5000K



AVAILABLE WITH MICROWAVE SENSOR FITTED

**OPTIONS**

**Wattages**

- 20W or 28W

**Emergency**

- M3L: Manual test
- STM3L: Self-test
- CSDAM3L: Casambi addressable test
- HSDAM3L: HubSense addressable test
- DAM3L: DALI addressable test

**Dimming**



- DD: Digital Dimming - DALI and Switch Dim
- CF: Corridor Function – dim-to-10%
- CS: Casambi smart wireless control
- HS: HubSense smart wireless control

**Sensor**

- MW: Microwave sensor fitted to the gear tray

**Snap-on bezel trim** – ordered separately, optional

- Chrome
- Satin chrome

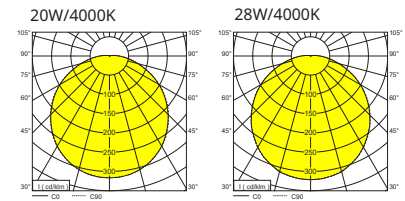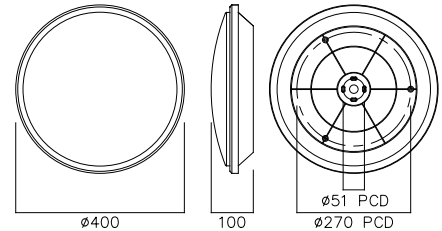

**KEY FEATURES**

- CCT SELECTABLE** – 3000K, 4000K & 5000K via slider switch on gear tray
- OUTPUT OPTIONS** – Choice of lumen packages to meet user requirements
- VERSATILE** – Choice of wattages, sensor and dimming makes ADDISON PRO suitable for many different projects

**SMART WIRELESS CONTROLS**



ADDISON PRO can be supplied with either **HubSense** or **Casambi** smart wireless control built-in.

**Casambi** and **HubSense** use Bluetooth wireless technology to provide comprehensive lighting control, including scene setting, energy saving and addressable emergency testing.

Contact our technical team for details – [technical@nvcuk.com](mailto:technical@nvcuk.com)

# ADDISON PRO

## 20W standard output and manual test emergency (M3L)

ORDER CODE	DIAMETER (mm)	BEZEL COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.w)	DIMMING	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
<b>STANDARD</b>										
NAD20/WH/830-40-50	400	White	20	2620	132				>80	3000 / 4000 / 5000
NAD20/WH/M3L/830-40-50	400	White	20	2620	132			M3L	>80	3000 / 4000 / 5000
<b>DIGITAL DIMMING</b>										
NAD20/DD/830-40-50	400	White	20	2620	132	Digital Dimming			>80	3000 / 4000 / 5000
NAD20/DD/M3L/830-40-50	400	White	20	2620	132	Digital Dimming		M3L	>80	3000 / 4000 / 5000
<b>MICROWAVE</b>										
NAD20/MW/830-40-50	400	White	20	2620	132		Microwave		>80	3000 / 4000 / 5000
NAD20/MW/M3L/830-40-50	400	White	20	2620	132		Microwave	M3L	>80	3000 / 4000 / 5000
<b>CORRIDOR FUNCTION MICROWAVE</b>										
NAD20/CFMW/830-40-50	400	White	20	2620	132	Corridor Function	Microwave		>80	3000 / 4000 / 5000
NAD20/CFMW/M3L/830-40-50	400	White	20	2620	132	Corridor Function	Microwave	M3L	>80	3000 / 4000 / 5000

## 28W high output and manual test emergency (M3L)

ORDER CODE	DIAMETER (mm)	BEZEL COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.w)	DIMMING	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
<b>STANDARD</b>										
NAD28/WH/830-40-50	400	White	27	3565	133				>80	3000 / 4000 / 5000
NAD28/WH/M3L/830-40-50	400	White	27	3565	133			M3L	>80	3000 / 4000 / 5000
<b>DIGITAL DIMMING</b>										
NAD28/DD/830-40-50	400	White	27	3565	133	Digital Dimming			>80	3000 / 4000 / 5000
NAD28/DD/M3L/830-40-50	400	White	27	3565	133	Digital Dimming		M3L	>80	3000 / 4000 / 5000
<b>MICROWAVE</b>										
NAD28/MW/830-40-50	400	White	27	3565	133		Microwave		>80	3000 / 4000 / 5000
NAD28/MW/M3L/830-40-50	400	White	27	3565	133		Microwave	M3L	>80	3000 / 4000 / 5000
<b>CORRIDOR FUNCTION MICROWAVE</b>										
NAD28/CFMW/830-40-50	400	White	27	3565	133	Corridor Function	Microwave		>80	3000 / 4000 / 5000
NAD28/CFMW/M3L/830-40-50	400	White	27	3565	133	Corridor Function	Microwave	M3L	>80	3000 / 4000 / 5000

## Accessories

ORDER CODE	DESCRIPTION
NAD/CH/TRIM	Addison Pro Chrome Trim
NAD/SCH/TRIM	Addison Pro Satin Chrome Trim
NAT/NAG/WIRE/SUSP/KIT	Wire Suspension 1.5m Kit for NAT, NAG, NAM & NAD Ranges