

**NEW**

# COLUMBUS

Power-selectable IP65 non-corrosive fitting with 'plug & play' accessories



### APPLICATIONS

- Factories, garages and workshops
- Food preparation areas
- Non-emergency versions rated to -20°C
- Emergency versions (with emergency conversion pack rated to 0°C)

### CONSTRUCTION

- Polycarbonate base and diffuser
- LEDs attached to diffuser so removing the diffuser exposes the terminal block
- Terminal block attached to base to make wiring easier
- Grade 201 stainless steel clips
- Reinforced drill points in base for direct surface fixing. Also suitable for surface mounting on spring clips and suspension on chain or conduit
- Power selectable. DIP switches on the driver provide multiple wattage settings for each variant

### OPTIONS

#### Length

- 4', 5' and 6' lengths available

#### Standard and high output


- At each length there is a standard and high output variant, each with multiple wattage settings

**Emergency conversion packs** – two plug-in emergency conversion packs are available, as listed below. **All maintained 3 hours with (LiFePO<sub>4</sub>) lithium batteries**

- M3L: Manual test
- STM3L: Self-test


#### Sensor

- MW: Microwave sensor fitted to the gear tray

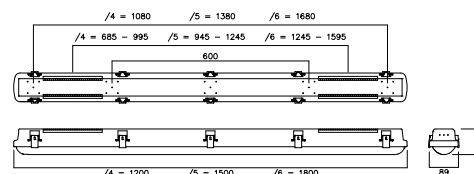

HIGH-OUTPUT 2X5'

STANDARD 1X5'

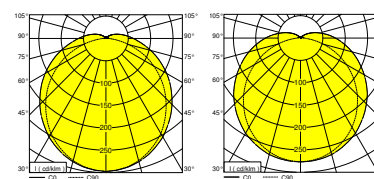

ORDER CODE	DIMENSIONS		POWER (W)	LUMENS (lm)	EFFICACY (Lm/c.W)	CRI	CCT (K)
	LENGTH FT	WIDTH MM					
NCB/4/15-26/840	4'	89	15 / 19 / 22 / 26	2090 / 2545 / 2946 / 3567	139 / 136 / 132 / 135	>80	4000
NCB/4/22-40/840	4'	89	22 / 28 / 34 / 40	3429 / 4204 / 4885 / 5557	154 / 147 / 145 / 141	>80	4000
NCB/5/20-36/840	5'	89	20 / 25 / 30 / 36	2739 / 3329 / 3859 / 4027	139 / 133 / 128 / 123	>80	4000
NCB/5/30-52/840	5'	89	30 / 38 / 45 / 52	4397 / 5260 / 6198 / 6936	143 / 140 / 137 / 133	>80	4000
NCB/6/27-47/840	6'	89	27 / 33 / 40 / 47	3695 / 4398 / 5154 / 5748	137 / 133 / 129 / 124	>80	4000
NCB/6/25-71/840	6'	89	25 / 31 / 38 / 44 / 51 / 57 / 64 / 71	3806 / 4705 / 5679 / 6502 / 7394 / 8070 / 8844 / 9566	153 / 153 / 151 / 148 / 145 / 142 / 138 / 135	>80	4000

### Optional - Emergency conversion pack

ORDER CODE	DESCRIPTION	MOUNTING	POWER	EMERGENCY
N/LINEAR/M3L/CONV-PACK	LiFe Linear M3L Emergency Conversion Pack	INTERNAL	2	M3L
N/LINEAR/STM3L/CONV-PACK	LiFe Linear STM3L Emergency Conversion Pack	INTERNAL	2	STM3L