

COLUMBUS

Power-selectable IP65
non-corrosive fitting with a
wide range of wattages



MICRO-WAVE SENSOR AVAILABLE

APPLICATIONS

- Factories, garages and workshops
- Food preparation areas
- Non-emergency versions rated to -20°C
- Emergency versions (with emergency conversion pack) rated to 0°C

SPECIFICATION

- Polycarbonate base and diffuser
- LEDs attached to diffuser so removing the diffuser exposes the terminal block
- Terminal block attached to base to make wiring easier
- Grade 201 stainless steel clips
- Reinforced drill points in base for direct surface fixing. Also suitable for surface mounting on spring clips and suspension on chain or conduit

OPTIONS

Lengths and wattages

- 4'. 4-way power selectable
- 5'. 4-way power selectable
- 6'. Standard output, 4-way power selectable.
- 6'. High output, 8-way power selectable



Emergency conversion packs – All maintained 3 hours with lithium (LiFePO₄) batteries

- M3L: Manual test
- STM3L: Self-test

Sensor

- Micro-wave occupancy sensor available with adjustable switch-on lux level, hold time and sensitivity:

This can be supplied ready fitted (suffix MW), or as a plug-in accessory for adding on site as required, as listed below

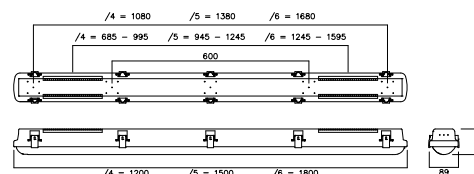

ORDER CODE	DIMENSIONS		POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.W)	CRI	CCT (K)
	LENGTH (mm)	WIDTH (mm)					
NCB/4/15-26/840	1200	89	15 / 19 / 22 / 26	2090 / 2545 / 2946 / 3567	139 / 136 / 132 / 135	>80	4000
NCB/4/15-26/M3L/840	1200	89	15 / 19 / 22 / 26	2090 / 2545 / 2946 / 3567	139 / 136 / 132 / 135	>80	4000
NCB/4/22-40/840	1200	89	22 / 28 / 34 / 40	3429 / 4204 / 4885 / 5557	154 / 147 / 145 / 141	>80	4000
NCB/4/22-40/M3L/840	1200	89	22 / 28 / 34 / 40	3429 / 4204 / 4885 / 5557	154 / 147 / 145 / 141	>80	4000
NCB/5/20-36/840	1500	89	20 / 25 / 30 / 34	2739 / 3329 / 3859 / 4755	139 / 133 / 128 / 139	>80	4000
NCB/5/20-36/M3L/840	1500	89	20 / 25 / 30 / 34	2739 / 3329 / 3859 / 4755	139 / 133 / 128 / 139	>80	4000
NCB/5/30-52/840	1500	89	30 / 38 / 45 / 52	4397 / 5260 / 6198 / 7945	143 / 140 / 137 / 149	>80	4000
NCB/5/30-52/M3L/840	1500	89	30 / 38 / 45 / 52	4397 / 5260 / 6198 / 7945	143 / 140 / 137 / 149	>80	4000
NCB/6/27-47/840	1800	89	27 / 33 / 40 / 47	3695 / 4398 / 5154 / 6281	137 / 133 / 129 / 138	>80	4000
NCB/6/27-47/M3L/840	1800	89	27 / 33 / 40 / 47	3695 / 4398 / 5154 / 6281	137 / 133 / 129 / 138	>80	4000
NCB/6/25-71/840	1800	89	25 / 31 / 38 / 44 / 51 / 57 / 64 / 71	4035 / 4705 / 5679 / 6502 / 7394 / 8070 / 8844 / 9566	162 / 153 / 151 / 148 / 145 / 142 / 138 / 135	>80	4000
NCB/6/25-71/M3L/840	1800	89	25 / 31 / 38 / 44 / 51 / 57 / 64 / 71	4035 / 4705 / 5679 / 6502 / 7394 / 8070 / 8844 / 9566	162 / 153 / 151 / 148 / 145 / 142 / 138 / 135	>80	4000

Emergency conversion packs

ORDER CODE	DESCRIPTION	POWER
N/LINEAR/M3L/CONV-PACK	LiFe Linear M3L Emergency Conversion Pack	2
N/LINEAR/STM3L/CONV-PACK	LiFe Linear STM3L Emergency Conversion Pack	2

MW Sensor

ORDER CODE	DESCRIPTION
N/MW/MC098S-991	Plug & Play MW Sensor for NGN PRO & NCB