

ARLINGTON LiFe

Versatile exit sign with drop blade with multitude of fixing options, for 3 hr maintained operation



IP20



LITHIUM



APPLICATIONS

- Corridors
- Exits
- Escape routes

TECHNICAL DETAILS

- 3 hr operation on battery power after mains power failure
- Can be installed as maintained or non-maintained. Details in instructions
- Charge indicator lamp fitted
- 30m maximum viewing distance
- Self-test (STM3) and DALI addressable test (DAM3) versions available as listed

CONSTRUCTION

- Injection moulded white polycarbonate body
- Main body rotates 90° to allow direct fixing to ceiling or a wall
- 5mm thick clear acrylic blade
- Changeable 0.25mm thick acrylic screen printed exit legends
- Supplied complete with either EURO legend "DOWN" arrow or ISO legend "UP" arrow (ahead)
- Lithium batteries included as standard

LiFe BENEFITS

Lithium batteries supplied as standard

- Longer-lasting – lithium batteries are warranted for 7-years from the data of installation
- 80% more efficient – lithium batteries only lose c.4% of their charge every month, compared with 20% loss with NiCd
- 50% less waste – lithium batteries last twice as long as NiCd, so there is 50% less waste



HEAD POSITIONED SO IT CAN BE MOUNTED ON THE CEILING



HEAD ROTATED 90° SO IT CAN BE MOUNTED ON THE WALL


ATTACHMENTS

LEGENDS Alternative legends available as listed

FIXING ATTACHMENTS Optional fixing attachments to allow:

- Recessed fixing
- Wire Suspension
- Side wall mounting

See page 63

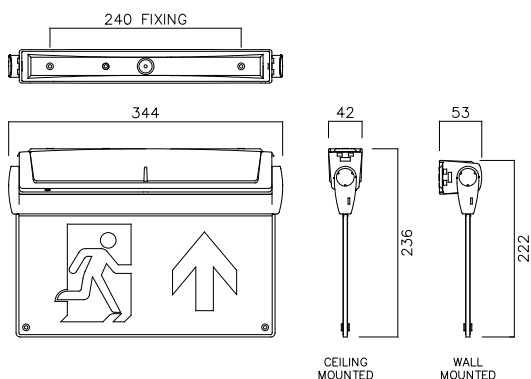

ORDER CODE	DESCRIPTION
NAL/M3	Arlington LiFe LED Maint. Blade Exit Sign Euro Down Legend
NAL/M3/ISO-U	Arlington LiFe LED Maint. Blade Exit Sign ISO Up Legend
NAL/STM3	Arlington LiFe LED Maint. Blade Exit Sign Euro Down Legend Self Test
NAL/STM3/ISO-U	Arlington LiFe LED Maint. Blade Exit Sign ISO Up Legend Self Test
NAL/DAM3	Arlington LiFe LED Maint. Blade Exit Sign Euro Down Legend DALI
NAL/DAM3/ISO-U	Arlington LiFe LED Maint. Blade Exit Sign ISO Up Legend DALI