

BALTIMORE

CCT and wattage selectable IP65 and IK10 polycarbonate wall pack with asymmetric light distribution



APPLICATIONS

- For wall mounting at building entrances, perimeters and along walkways

SPECIFICATION

- Polycarbonate base, black
- Clear polycarbonate cover
- IP65 and IK10 rated
- Selectable CCT: 3000K, 4000K, 6000K
- Selectable wattage: 16W, 24W
- Drill points for cable entry on sides and rear
- Supplied with M20 blanking plug – use optional
- Supplied with stainless steel wall mounting bracket
- Hinged gear tray
- Acrylic (PMMA) lens with asymmetric distribution



OPTIONS

Emergency

- M3L: Manual test

Sensor

- PEC: Photo-Electric Cell for dusk / dawn operation, switching on at 15 lux and off at 45 lux.

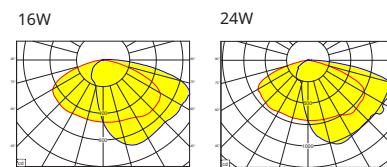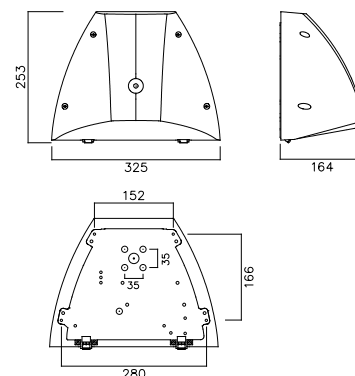

ORDER CODE	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.W)	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
STANDARD							
NBM16-24/830-40-60	16 / 24	2298 / 3260	145 / 136			>80	3000 / 4000 / 6000
NBM16-24/M3L/830-40-60	16 / 24	2298 / 3260	145 / 136		M3L	>80	3000 / 4000 / 6000
PHOTO-ELECTRIC CELL							
NBM16-24/PEC/830-40-60	16 / 24	2298 / 3260	145 / 136	Photo-Electric Cell		>80	3000 / 4000 / 6000
NBM16-24/PEC/M3L/830-40-60	16 / 24	2298 / 3260	145 / 136	Photo-Electric Cell	M3L	>80	3000 / 4000 / 6000