

BRONX SLIM

IP65 and IK10 rated die-cast aluminium and polycarbonate wall pack for commercial outdoor use



APPLICATIONS

- For commercial exterior use on building entrances, perimeters and along walkways

SPECIFICATION

- Die-cast aluminium base with heat sink, painted black
- Hinged, UV stable polycarbonate cover with opal diffuser and black hood
- IP65 and IK10 rated
- M20 tapped hole with IP68 cable gland fitted
Supplied with M20 blanking plug – use optional



OPTIONS

Emergency

- M3L: Manual test
- STM3L: Self-test
- CSDAM3L: Casambi addressable test
- HSDAM3L: HubSense addressable test
- DAM3L: DALI addressable test

Sensor

- PEC: Photo-Electric Cell for dusk / dawn operation, switching on at 15 lux and off at 45 lux.

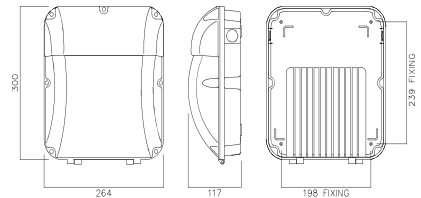

KEY FEATURES

- ROBUST** – IK10 rated so suitable for areas where impact resistance is required
- SENSORS** – Optional photo-electric cell for dusk to dawn operation
- HINGED COVER** – Allows for easy installation & maintenance

Standard output and manual test emergency (M3L)

ORDER CODE	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.w)	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
STANDARD							
NBX30SL/LED/840	30	2490	87			>80	4000
NBX30SL/LED/M3L/840	30	2490	87		M3L	>80	4000
PHOTO-ELECTRIC CELL							
NBX30SL/LED/PEC/840	30	2490	87	Photo-Electric Cell		>80	4000
NBX30SL/LED/PEC/M3L/840	30	2490	87	Photo-Electric Cell	M3L	>80	4000