

BROOKLYN

Stylish CCT and wattage selectable
IP65 and IK10 die-cast aluminium
wall pack with asymmetric light
distribution



APPLICATIONS

- For wall mounting at building entrances, perimeters and along walkways

SPECIFICATION

- Die-cast aluminium base, painted black
- Clear polycarbonate cover
- IP65 and IK10 rated
- Selectable CCT: 3000K, 4000K, 6000K
- Selectable wattage: 18W, 28W
- Drill points for cable entry on sides and rear
- Supplied with M20 blanking plug – use optional
- Supplied with stainless steel wall mounting bracket
- Acrylic (PMMA) lens with asymmetric distribution

OPTIONS

Emergency – all maintained 3 hours with lithium (LiFePO4) batteries


- M3L: Manual test
- STM3L: Self-test
- DAM3L: DALI addressable test

Dimming

- CF: Corridor Function
- DD: Digital Dimming, DALI and Switch Dim

Sensor

- PEC: Photo-Electric Cell for dusk / dawn operation, switching on at 15 lux and off at 45 lux.

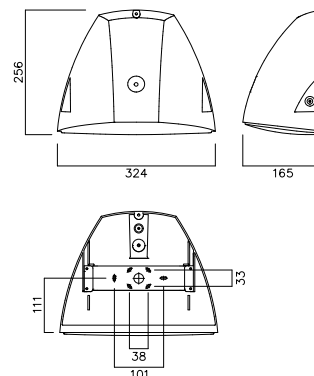

KEY FEATURES

ASYMMETRIC OPTICS – Lenses direct the light down and away from the wall

MULTI-WATTAGE – Choice of two outputs via slider switch

CCT SELECTABLE - 3000K, 4000K & 6000K via slider switch

ROBUST – IK10 rated so suitable for areas where impact resistance is required

ORDER CODE	POWER (W)	LUMENS (lm)	EFFICACY (lm/c.W)	SENSOR TYPE	DIMMING	EMERGENCY	CRI	CCT (K)
STANDARD								
NBR18-28/830-40-60	18 / 28	2263 / 3401	129 / 126				>80	3000 / 4000 / 6000
NBR18-28/M3L/830-40-60	18 / 28	2263 / 3401	129 / 126			M3L	>80	3000 / 4000 / 6000
PHOTO-ELECTRIC CELL								
NBR18-28/PEC/830-40-60	18 / 28	2263 / 3401	129 / 126	Photo-Electric Cell			>80	3000 / 4000 / 6000
NBR18-28/PEC/M3L/830-40-60	18 / 28	2263 / 3401	129 / 126	Photo-Electric Cell		M3L	>80	3000 / 4000 / 6000
SINGLE WATTAGE DD DIM								
NBR18/DD/830-40-60	18	2263	129		Digital Dimming		>80	3000 / 4000 / 6000
NBR18/DD/M3L/830-40-60	18	2263	129		Digital Dimming	M3L	>80	3000 / 4000 / 6000
NBR28/DD/830-40-60	28	3401	126		Digital Dimming		>80	3000 / 4000 / 6000
NBR28/DD/M3L/830-40-60	28	3401	126		Digital Dimming	M3L	>80	3000 / 4000 / 6000

* RESULTS @ 4000K

BROOKLYN

IMPACT RESISTANT

Die-cast aluminium body, IK10 rated, designed to withstand rough treatment

PHOTO-CELL READY

Position of photocell, when fitted

REAR OR SIDE CABLE ENTRY

20mm drill points provided for side or rear cable entry

EASY INSTALLATION


Hinged gear tray for easy installation and maintenance

TOOLLESS TERMINAL BLOCK

4-pole, piano-key loop-in / loop-out terminal block

CCT & POWER SELECTABLE

CCT and wattage selection switches

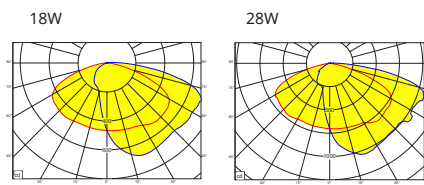

CCT Selectable

Choose between 3000K, 4000K or 6000K to suit the location and ambience required.

Power Selectable

With a choice of 18W or 28W, the output of BROOKLYN can be raised or lowered to suit the application.

Asymmetric Lens

The PMMA lens on BROOKLYN directs light down and away from the wall on which it is mounted, creating an ideal light distribution for paths.