

COLUMBIA **NEW**

Stylish IP65 power and CCT selectable post-top fitting



APPLICATIONS

- Car parks
- Parks and gardens

SPECIFICATION

- Die-cast aluminium base and top cover
- Base and top finished with anti-corrosion matt paint, grey (RAL9007) or black (RAL9017)
- Clear polycarbonate main cover
- Pre-wired with 6m of 1,5mm² 3 core flex
- Surge protection device fitted, 10kV common & differential modes
- For 60mm or 76mm spigot entry. Supplied with a 60mm removable collar fitted.
- Power selectable, 20W, 30W and 40W
- CCT selectable, 2700K, 3000K and 4000K

OPTIONS



Photo-Electric Cell

- PE1: supplied with NEMA socket located centrally on the top cover and a compatible PE cell for dusk/dawn control, switching on at 10 lux and off at 80 lux

Paint finish

- Grey, GRY, RAL9007
- Black, BK, RAL9017

COLUMBIA LIGHT DISTRIBUTION DIAGRAM

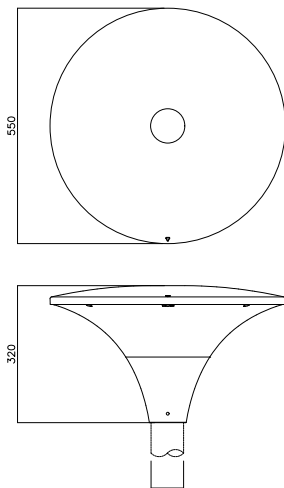

DIA 76 / 60 FIXING OPTIONS

ORDER CODE	WEIGHT (kg)	WINDAGE (m ²)	POWER (W)	LUMENS (lm)	EFFICACY (lm/c.W)	SENSOR TYPE	CRI	CCT (K)
NCM20-30-40/GRY/827-30-40	7	0.34	20 / 30 / 40	2626 / 4043 / 5192	132 / 129 / 129		>80	2700 / 3000 / 4000
NCM20-30-40/BK/827-30-40	7	0.34	20 / 30 / 40	2626 / 4043 / 5192	132 / 129 / 129		>80	2700 / 3000 / 4000
PHOTO-ELECTRIC CELL								
NCM20-30-40/GRY/PE1/827-30-40	7	0.34	20 / 30 / 40	2626 / 4043 / 5192	132 / 129 / 129	Photo-Electric Cell	>80	2700 / 3000 / 4000
NCM20-30-40/BK/PE1/827-30-40	7	0.34	20 / 30 / 40	2626 / 4043 / 5192	132 / 129 / 129	Photo-Electric Cell	>80	2700 / 3000 / 4000