


NEW

DALLAS PRO

Multi-wattage fittings for surface or suspended installation, offered in down-only or bi-directional light distribution.

Customise the body in any **colour** to seamlessly complement your space.

Colour match to any RAL number of your choice

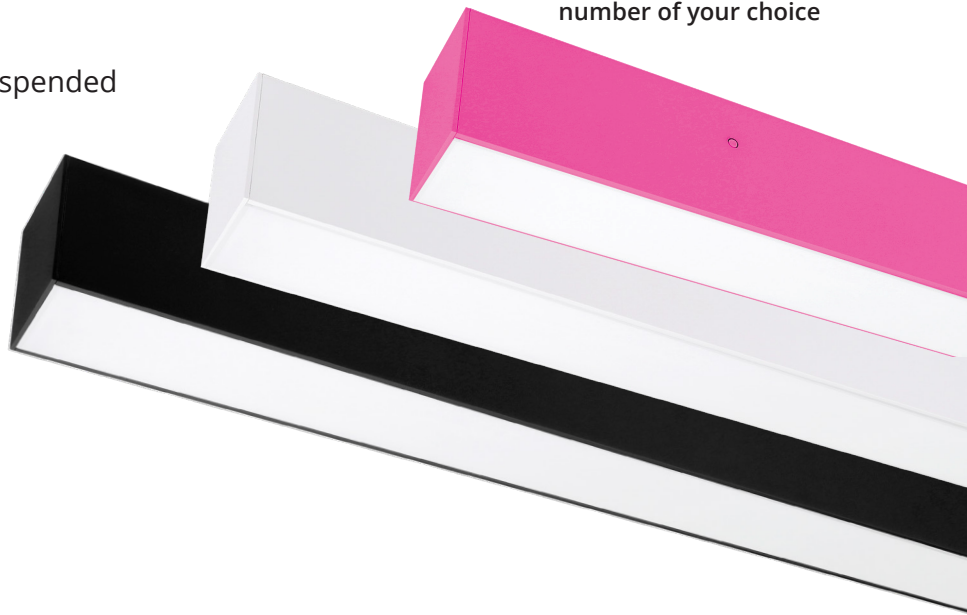

APPLICATIONS

- Corridors and communal areas in offices, schools and public buildings
- The suspended version is a great solution for spaces with high or sloping ceilings

CONSTRUCTION

- Aluminium body, painted white (RAL9016) or black (RAL9005). Customised colours available
- UV stable polycarbonate microprismatic controller
- Available in down-only (DO) and bi-directional (BD, 70% down, 30% up) variants
- Available in two lengths, 4' and 5', each with a multi-wattage driver
- Can be installed singly or joined together (L, T, X or straight) to create multiple shapes



OPTIONS

Emergency – all maintained 3 hours with lithium (LiFePO4) batteries

- M3L: Manual test
- STM3L: Self-test
- HSDAM3L: HubSense addressable test
- DAM3L: DALI addressable test

Dimming

- DD: Digital Dimming - DALI and Switch Dim
- CF: Corridor Function – dim-to-10%
- HS: HubSense smart wireless control

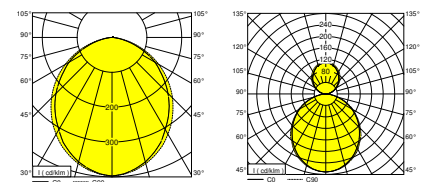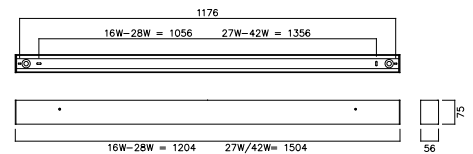

DOWN ONLY (DO) LIGHT DISTRIBUTION

BI-DIRECTIONAL (BD) LIGHT DISTRIBUTION

KEY FEATURES

LOW GLARE – Achieves UGR<19 while allowing for good uniformity

MULTI-WATTAGE – Choice of 4 wattages via dip-switch selection

CHOICE OF BODY COLOUR – Black & white as standard, or any customised colour

EFFICIENCY – Achieves up to 151 luminaire lumens per circuit watt




SMART CONTROLS WITH HUBSENSE

HubSense is the most functional, flexible and open smart wireless lighting control system available today. Our fitting can be supplied with HubSense installed, ready to deliver even greater energy savings, sophisticated control and full remote emergency test and monitoring.


Contact our technical team for details - technical@nvcuk.com

DALLAS PRO

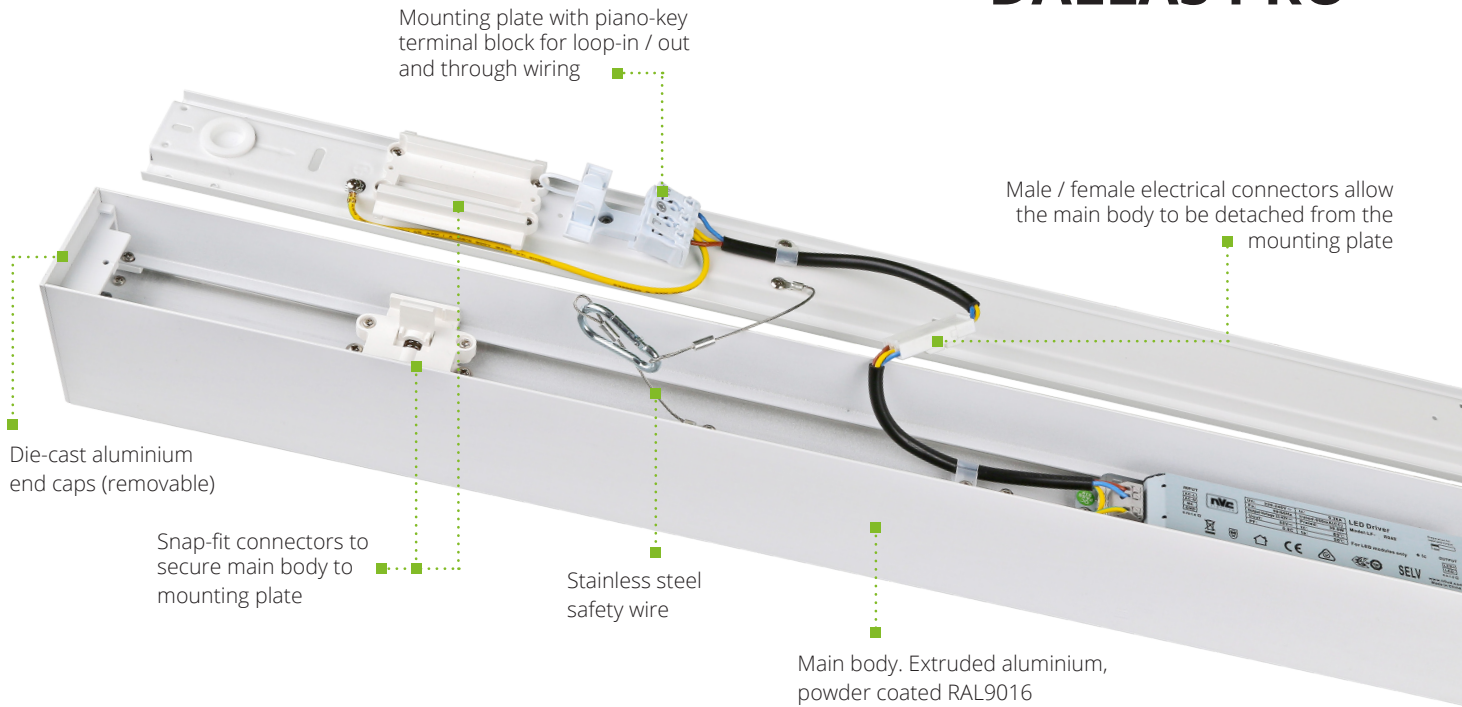

Fittings can be installed individually or as continuous runs in straight-line, L, T or X configurations and the suspended versions can deliver 100% downlight, or a mix of 70% downlight and 30% uplight.


DALLAS PRO ACCESSORIES

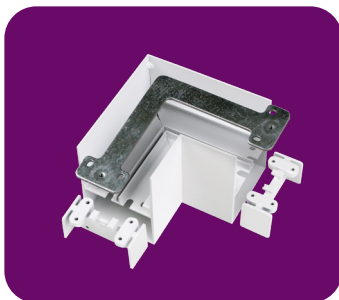

"L" COUPLING KIT



"T" COUPLING KIT

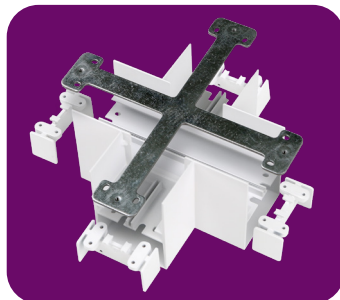

"X" COUPLING KIT



STRAIGHT COUPLING KIT



BLANK IN-FILL SPACERS AVAILABLE IN VARIOUS LENGTHS



WIRE SUSPENSION KIT - 1.5M COMES AS STANDARD WITH BI-DIRECTIONAL VERSIONS

DALLAS PRO

Down-only with manual test emergency (M3L)

ORDER CODE	DIMENSIONS LENGTH FT	BODY COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	OPTICAL DIRECTION	EMERGENCY	CRI	CCT (K)
WHITE									
NDL4/16-28/WH/DO/840	4'	White	16 / 20 / 23 / 27	2381 / 2933 / 3502 / 3999	151 / 150 / 150 / 148	Down Only		>80	4000
NDL4/16-28/WH/DO/M3L/840	4'	White	16 / 20 / 23 / 27	2381 / 2933 / 3502 / 3999	151 / 150 / 150 / 148	Down Only	M3 Lithium	>80	4000
NDL5/27-42/WH/DO/840	5'	White	26 / 32 / 34 / 40	3814 / 4669 / 4906 / 5687	147 / 145 / 144 / 142	Down Only		>80	4000
NDL5/27-42/WH/DO/M3L/840	5'	White	26 / 32 / 34 / 40	3814 / 4669 / 4906 / 5687	149 / 145 / 144 / 142	Down Only	M3 Lithium	>80	4000
BLACK									
NDL4/16-28/BK/DO/840	4'	Black	16 / 20 / 23 / 27	2381 / 2933 / 3502 / 3999	151 / 150 / 150 / 148	Down Only		>80	4000
NDL4/16-28/BK/DO/M3L/840	4'	Black	16 / 20 / 23 / 27	2381 / 2933 / 3502 / 3999	151 / 150 / 150 / 148	Down Only	M3 Lithium	>80	4000
NDL5/27-42/BK/DO/840	5'	Black	26 / 32 / 34 / 40	3814 / 4669 / 4906 / 5687	147 / 145 / 144 / 142	Down Only		>80	4000
NDL5/27-42/BK/DO/M3L/840	5'	Black	26 / 32 / 34 / 40	3814 / 4669 / 4906 / 5687	149 / 145 / 144 / 142	Down Only	M3 Lithium	>80	4000

Bi-directional with manual test emergency (M3L)

ORDER CODE	DIMENSIONS LENGTH FT	BODY COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	OPTICAL DIRECTION	EMERGENCY	CRI	CCT (K)
WHITE									
NDL4/26-40/WH/BD/840	4'	White	26 / 32 / 34 / 40	3725 / 4509 / 4763 / 5499	144 / 141 / 141 / 139	Up & Down		>80	4000
NDL4/26-40/WH/BD/M3L/840	4'	White	26 / 32 / 34 / 40	3725 / 4509 / 4763 / 5499	144 / 141 / 141 / 139	Up & Down	M3 Lithium	>80	4000
NDL5/43-55/WH/BD/840	5'	White	43 / 47 / 51 / 55	5959 / 6779 / 7009 / 7529	140 / 145 / 138 / 137	Up & Down		>80	4000
NDL5/43-55/WH/BD/M3L/840	5'	White	43 / 47 / 51 / 55	5959 / 6779 / 7009 / 7529	142 / 145 / 138 / 137	Up & Down	M3 Lithium	>80	4000
BLACK									
NDL4/26-40/BK/BD/840	4'	Black	26 / 32 / 34 / 40	3725 / 4509 / 4763 / 5499	144 / 141 / 141 / 139	Up & Down		>80	4000
NDL4/26-40/BK/BD/M3L/840	4'	Black	26 / 32 / 34 / 40	3725 / 4509 / 4763 / 5499	144 / 141 / 141 / 139	Up & Down	M3 Lithium	>80	4000
NDL5/43-55/BK/BD/840	5'	Black	43 / 47 / 51 / 55	5959 / 6779 / 7009 / 7529	141 / 145 / 138 / 137	Up & Down		>80	4000
NDL5/43-55/BK/BD/M3L/840	5'	Black	43 / 47 / 51 / 55	5959 / 6779 / 7009 / 7529	143 / 145 / 138 / 137	Up & Down	M3 Lithium	>80	4000

Accessories

ORDER CODE	DESCRIPTION
NDL/STRAIGHT/WH	Dallas Pro Straight Joiner White
NDL/STRAIGHT/BK	Dallas Pro Straight Joiner Black
NDL/L/WH	Dallas Pro L Coupling Kit White
NDL/L/BK	Dallas Pro L Coupling Kit Black
NDL/T/WH	Dallas Pro T Coupling Kit White
NDL/T/BK	Dallas Pro T Coupling Kit Black
NDL/X/WH	Dallas Pro X Coupling Kit White
NDL/X/BK	Dallas Pro X Coupling Kit Black
NDL4/WH/BLANK/SPACER	Dallas Pro WH 4Ft Blank Spacer c/w Straight Coupling Kits
NDL5/WH/BLANK/SPACER	Dallas Pro WH 5Ft Blank Spacer c/w Straight Coupling Kits
NDL4/BK/BLANK/SPACER	Dallas Pro BK 4Ft Blank Spacer c/w Straight Coupling Kits
NDL5/BK/BLANK/SPACER	Dallas Pro BK 5Ft Blank Spacer c/w Straight Coupling Kits
NDL/WSK	Dallas Pro 1.5M Wire Suspension Kit
NDL/3M/WSK	Dallas Pro 3M Wire Suspension Kit



For colour variants contact sales@nvcuk.com with your RAL number

