

# DENALI

Contemporary design IP65 and IK10 rated aluminium bulkhead



DENALI IS AVAILABLE WITH A STANDARD CIRCULAR BEZEL OR AN EYELID BEZEL



**APPLICATIONS**

- Aluminium bulkhead for commercial exterior use

**SPECIFICATION**

- Die-cast aluminium base and bezel
- Light textured dark grey paint finish (RAL7012)
- Opal polycarbonate diffuser
- Piano-key terminals for 2 x 1.5mm<sup>2</sup> cable
- Twin rear cable entry points with grommets supplied

**OPTIONS**

**Emergency** – all maintained 3 hours with (LiFePO<sub>4</sub>) lithium batteries

- M3: Manual test
- STM3: Self-test


**Dimming**

- CF: Corridor Function
- DD: Digital Dimming, DALI and Switch Dim


**Sensor**

- MW: Microwave sensor fitted to the gear tray, not available on eyelid and emergency versions


**STANDARD BEZEL**

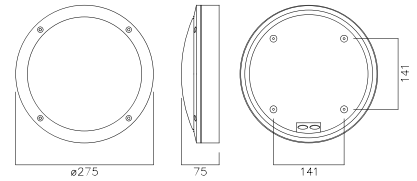


**EYELID BEZEL**

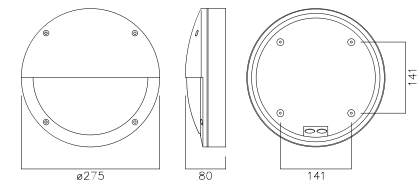

**STANDARD**



**EYELID**



**KEY FEATURES**

**STYLISH** – High quality aluminium finish in contemporary design

**BEZEL OPTIONS** – Standard circular or eyelid bezel

**ROBUST** – IK10 rated so suitable for areas where impact resistance is required

ORDER CODE	DIAMETER (mm)	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	EMERGENCY	CRI	CCT (K)
<b>STANDARD BEZEL</b>							
NDE15/840	275	18	1759	96		>80	4000
NDE15/M3L/840	275	18	1759	96	M3L	>80	4000
<b>EYELID BEZEL</b>							
NDE15/ELID/840	275	17	1295	76		>80	4000
NDE15/ELID/M3L/840	275	17	1295	76	M3L	>80	4000