

FLORIDA

A 600x600 panel with an opal diffuser or UGR<19 microprismatic controller



APPLICATIONS

- Offices
- General commercial use

SPECIFICATION

- Aluminium frame, painted white (RAL9003)
- TP(b) rated UV stable polystyrene opal diffuser or microprismatic controller
- For lay-in installation in 15-24mm exposed T ceilings
- Supplied complete with a loop-in / loop-out connection block


OPTIONS

Optics


- O: Opal diffuser
- UGR<19: Microprismatic controller, for projects requiring lower glare

Emergency – all maintained 3 hours with lithium (LiFePO4) batteries


- For M3 manual test and M3 self-test, please order one of the emergency conversion packs listed below.

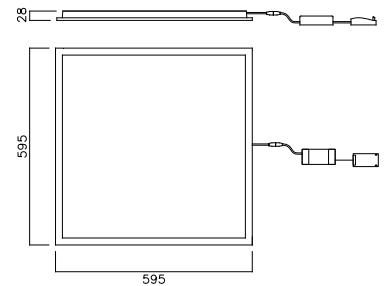

OPAL



UGR<19



ORDER CODE	DIMENSIONS		POWER (W)	LUMENS (lm)	EFFICACY (Lm/c.W)	OPTICS	CRI	CCT (K)
	WIDTH	LENGTH						
NFL/O/66/840	595	595	27	3369	123	Opal	>80	4000
NFL/UGR19/66/840	595	595	27	3595	135	UGR<19	>80	4000

Optional - Emergency conversion packs

ORDER CODE	DESCRIPTION
N/REC/M3/PACK/V2	M3 Pack V2 LiFePO4 For Recessed Product Ranges
N/REC/STM3/PACK/V2	M3 Pack V2 LiFePO4 Self Test For Recessed Product Ranges



SEE PAGE 77