

GREENLAND

Premium polycarbonate IP66 weather-proof, non-corrosive fitting with dimming and sensor options



BATTEN MOUNT PIR SENSOR AND REMOTE HANDSET AVAILABLE SEPARATELY - SEE PAGE 98



APPLICATIONS

- Factories, garages and workshops
- Food preparation areas
- Non-emergency versions rated to -20°C (M3L versions rated to 0°C)
- Resistant to impact and many chemical agents, but for suitability in specific environments please take specialist advice
- External under-canopy use

CONSTRUCTION

- Polycarbonate base and opal diffuser
- Grade 304 stainless steel diffuser locking and surface mounting clips
- Reinforced drill points in base for direct surface fixing, or conduit suspension
- Can also be suspended from wire/chain using clips provided

TECHNICAL DETAILS

- Single and twin rows of LEDs
- 170 lm/W
- **640mm (2ft)**
 - Single 9.5W, 1,140 lm, 120 l.lm/c.W
 - Twin 17W, 2,128 lm, 123 l.lm/c.W
- **1,240mm (4ft)**
 - Single 28W, 3,400 lm, 121 l.lm/c.W
 - Twin 45W, 6,370 lm, 140 l.lm/c.W
- **1,540mm (5ft)**
 - Single 36W, 5,012 lm, 139 l.lm/c.W
 - Twin 73W, 9,865 lm, 135 l.lm/c.W
- **1,840mm (6ft)**
 - Single 48W, 5,900 lm, 122 l.lm/c.W
 - Twin 97W, 11,652 lm, 121 l.lm/c.W
- CRI>80
- CCT 4000K in 2ft, 4ft, 5ft and 6ft or CCT 5000K in 4ft and 5ft as listed
- Branded ENEC approved, flicker free driver

OPTIONS


EMERGENCY

- Maintained 3 hr versions available for all sizes (except 1x2ft variant). Add suffix M3L
- Self-Test Emergency (suffix STM3) or DALI Addressable Emergency (suffix DAM3)
- High-output emergency (Suffix M3LH or STM3LH)


• **DIMMING DD** (DALI or Switch-Dim) or **CF** (Corridor Function) available. Add suffix DD or CF as required

SENSOR Available with microwave occupancy sensor fitted internally, available on all variants. Add suffix MW

SMART WIRELESS lighting control and addressable test options are available. See pages 100-103 or contact our technical team for details

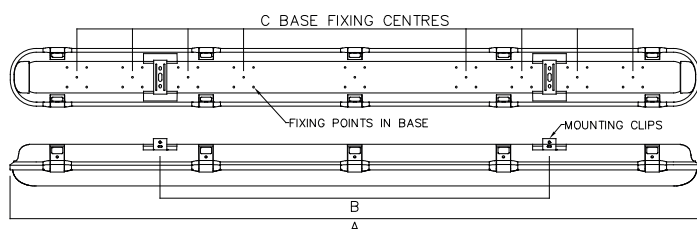

SIZE	A	B	C
1X2/2X2	640	370	440
1X4/2X4	1240	800	600/800/1000
1X5/2X5	1540	940	600/800/1000/1200
1X6/2X6	1840	1280	800/1000/1200/1400/1600



ORDER CODE	DESCRIPTION	4000K
NGN1X2/840	Greenland LED V2 Single 2Ft 840	
NGN1X4/840	Greenland LED V2 Single 4Ft 840	
NGN1X5/840	Greenland LED V2 Single 5Ft 840	
NGN1X6/840	Greenland LED V2 Single 6Ft 840	
NGN2X2/840	Greenland LED V2 Twin 2Ft 840	
NGN2X4/840	Greenland LED V2 Twin 4Ft 840	
NGN2X5/840	Greenland LED V2 Twin 5Ft 840	
NGN2X6/840	Greenland LED V2 Twin 6Ft 840	
ORDER CODE	DESCRIPTION	5000K
NGN1X4/850	Greenland LED V2 Single 4Ft 850	
NGN1X5/850	Greenland LED V2 Single 5Ft 850	
NGN2X4/850	Greenland LED V2 Twin 4Ft 850	
NGN2X5/850	Greenland LED V2 Twin 5Ft 850	