

KANSAS LiFe

A range of IP20 and IP65 non-maintained emergency twinspots



MANUAL TEST IP20

MANUAL & SELF TEST IP65

APPLICATIONS

- Industrial and warehouse projects
- Final exits

SPECIFICATION

- Polycarbonate body, black or white
- Polycarbonate heads, including lenses, which can be rotated and tilted
- Suitable for mounting in any orientation
- Lithium (LiFePO4) batteries included
- Designed to operate from 0°C to 40°C

OPTIONS

IP rating – choice of IP20 and IP65

Test methods

- NM3: Manual test
- STNM3: Self-test
- DA/NM3: DALI addressable test
- CSDA/NM3: Casambi addressable test
- HS/DANM3: HubSense addressable test

Body colour – choice of white or black

KEY FEATURES

FLEXIBILITY – Options to cover different outputs and functionality needs

7-YEAR WARRANTY – Including the batteries

COLOUR CHOICES – Available in white or black

HIGH AMBIENT OPERATING TEMPERATURE – Up to 40°C

SMART WIRELESS CONTROLS



CASAMBI

KANSAS LiFe can be supplied with either **HubSense** or **Casambi** smart wireless control built-in.


Casambi and **HubSense** use Bluetooth wireless technology to provide comprehensive lighting control, including scene setting, energy saving and addressable emergency testing.

Contact our technical team for details – technical@nvcuk.com

KANSAS LiFe




HIGH OUTPUT IP65 - MANUAL TEST

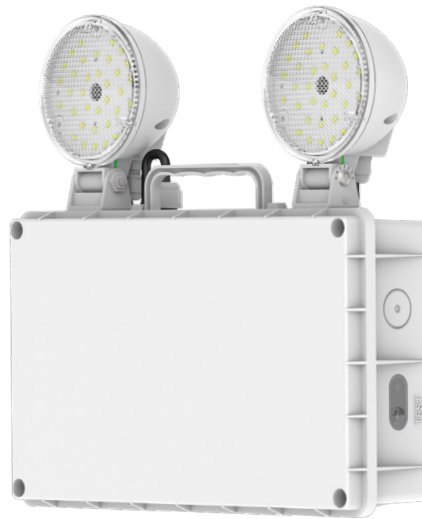

ADDRESSABLE IP65


Manual Test IP20

ORDER CODE	COLOUR	IP RATING	POWER (W)	LUMENS (lm)	EMERGENCY
NKS/NM3	WHITE	20	2x3	300	Manual-test




Manual & Self Test IP65

ORDER CODE	COLOUR	IP RATING	POWER (W)	LUMENS (lm)	EMERGENCY
NKS/IP65/NM3	WHITE	65	2x3	380	Manual-test
NKS/IP65/STNM3	WHITE	65	2x3	380	Self-Test

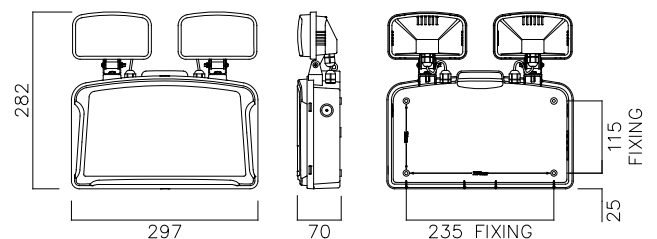

High Output IP65 - Manual Test

ORDER CODE	COLOUR	IP RATING	POWER (W)	LUMENS (lm)	EMERGENCY
NKS/IP65/HO/NM3	WHITE	65	9	1000	Manual Test
NKS/BK/IP65/HO/NM3	BLACK	65	9	1000	Manual Test
NKS/BK/IP65/NM3	BLACK	65	5	500	Manual Test

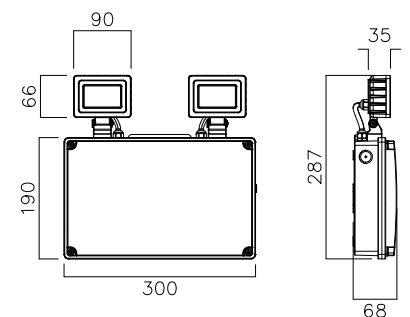

Addressable IP65

ORDER CODE	COLOUR	IP RATING	POWER (W)	LUMENS (lm)	EMERGENCY
NKS/IP65/DA/NM3	WHITE	65	2x3	768	DALI Addressable
NKS/BK/IP65/DA/NM3	BLACK	65	2x3	768	DALI Addressable
NKS/IP65/HS/DANM3	WHITE	65	2x3	768	HubSense Addressable
NKS/BK/IP65/HS/DANM3	BLACK	65	2x3	768	HubSense Addressable

