

KELSO

A slim and compact low-bay



APPLICATIONS

- Factories, workshops and warehouses
- Mounting heights up to 7m

SPECIFICATION

- Steel body, painted white (RAL9003)
- LEDs under UV stable PC lens panel giving 110° beam angle
- Aluminium extruded heat sink
- For suspended or surface installation
- Cable entry on rear or via 20mm knock-outs on end


OPTIONS

Wattage

- Choice of 2 wattages, 100W & 135W

Emergency


- M3L: Manual test, maintained 3 hours with lithium (LiFePO₄) batteries

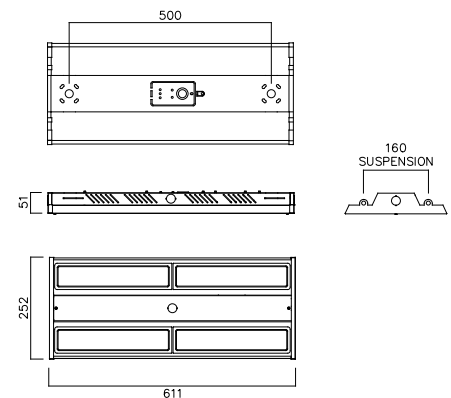

TOP FLAP ACCESS FOR EASY LOOP-IN / LOOP-OUT WIRING



VERSATILE MOUNTING OPTIONS INCLUDING BESA, CONDUIT, BRACKET, SUSPENDED AND CEILING MOUNTING

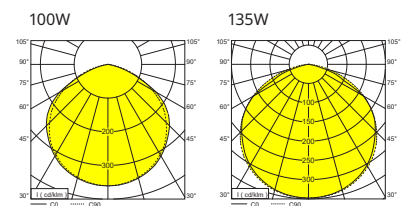

ORDER CODE	DIMENSIONS (mm)		POWER (W)	LUMENS (lm)	EFFICACY (lm/c.W)	EMERGENCY	CRI	CCT (K)
	LENGTH	WIDTH						
NKE100/840	611	252	100	15068	151		>80	4000
NKE100/M3L/840	611	252	100	15068	151	M3L	>80	4000
NKE135/840	611	252	135	21215	157		>80	4000
NKE135/M3L/840	611	252	135	21215	157	M3L	>80	4000