

LEXINGTON LiFe

Emergency exit box in manual test, self-test and HubSense addressable test versions



APPLICATIONS

- Exits and escape routes

CONSTRUCTION

- Steel body, painted white
- Polycarbonate legend panel
- Supplied with either Euro "down arrow" or ISO "up arrow" legend for ahead indication
- Lithium batteries included
- For installation in maintained (M3) or non-maintained (NM3) mode
- 30m maximum viewing distance
- Designed to operate between 0°C to 40°C

OPTIONS


Test methods

- Manual test: M3
- Self-test: STM3
- HubSense addressable test: HSDAM3
- DALI addressable test: DAM3


Legends are available in two styles

- Euro style (92/58/EEC) as standard
- ISO style (ISO7010/BS5266) – ISO

WITH ISO LEGEND

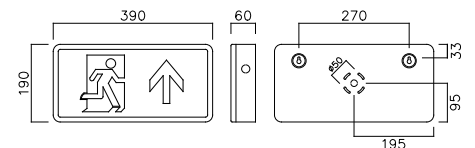

WITH EURO LEGEND

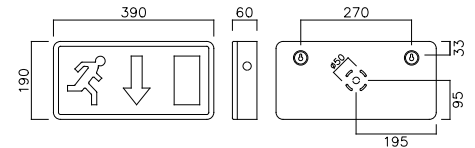


KEY FEATURES

GREENER TECHNOLOGY – Uses longer lasting and safer Lithium (LiFePO₄) batteries

7-YEAR WARRANTY – For peace of mind & includes the batteries

TEST OPTIONS – Manual test, self-test, DALI addressable & smart wireless addressable

HIGHER AMBIENT OPERATING TEMPERATURE – 0°C to 40°C



SMART CONTROLS WITH HUBSENSE

HubSense is the most functional, flexible and open smart wireless lighting control system available today. Our fitting can be supplied with HubSense installed, ready to deliver even greater energy savings, sophisticated control and full remote emergency test and monitoring.

Contact our technical team for details - technical@nvcuk.com

ORDER CODE	POWER	LEGEND	EMERGENCY
NLE/M3	1	EURO	Manual-test
NLE/M3/ISO-U	1	ISO UP	Manual-test
NLE/STM3	1	EURO	Self-test
NLE/STM3/ISO-U	1	ISO UP	Self-test
ADDRESSABLE			
NLE/DAM3	1	EURO	DALI Addressable
NLE/HS/DAM3	1	EURO	Wireless Addressable
NLE/DAM3/ISO-U	1	ISO UP	DALI Addressable
NLE/HS/DAM3/ISO-U	1	ISO UP	Wireless Addressable

Legends

ORDER CODE	LEGEND
NLE/LE/DOWN	EURO
NLE/LE/LEFT	EURO
NLE/LE/RIGHT	EURO
NLE/LE/UP	EURO
NLE/ISO/LE/DOWN	ISO
NLE/ISO/LE/LEFT	ISO
NLE/ISO/LE/RIGHT	ISO
NLE/ISO/LE/UP	ISO