

# LEXINGTON LiFe

Emergency exit box in manual test, self-test, DALI addressable and Wireless addressable test versions



## APPLICATIONS

- Exits and escape routes

## SPECIFICATION

- Steel body, painted white
- Polycarbonate legend panel
- Supplied with either Euro "down arrow" or ISO "up arrow" legend for ahead indication
- Lithium batteries included
- For installation in maintained (M3) or non-maintained (NM3) mode
- 30m maximum viewing distance
- Designed to operate from 0°C to 40°C

## OPTIONS


### Test methods

- M3: Manual test
- STM3: Self-test
- DAM3: DALI addressable test
- CSDAM3: Casambi addressable test
- HSDAM3: HubSense addressable test


### Legends are available in two styles

- Euro style (92/58/EEC) or
- ISO style (ISO7010/BS5266) – ISO

## WITH EURO LEGEND

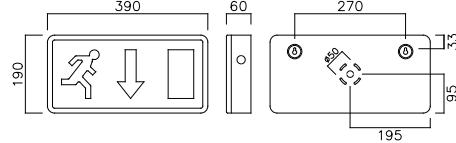

## WITH ISO LEGEND

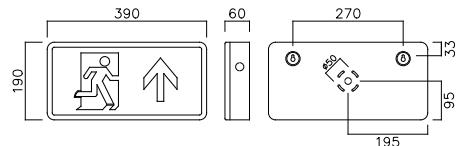

## KEY FEATURES

**7-YEAR WARRANTY** – Including the batteries

**TEST OPTIONS** – Manual test, self-test, DALI addressable and wireless addressable

**HIGH AMBIENT OPERATING TEMPERATURE** – Up to 40°C

## SMART WIRELESS CONTROLS



LEXINGTON LiFe can be supplied with either **HubSense** or **Casambi** smart wireless control built-in.

**Casambi** and **HubSense** use Bluetooth wireless technology to provide comprehensive lighting control, including scene setting, energy saving and addressable emergency testing.

Contact our technical team for details – [technical@nvcuk.com](mailto:technical@nvcuk.com)

ORDER CODE	POWER	LEGEND	EMERGENCY
NLE/M3	1	EURO	Manual-test
NLE/STM3	1	EURO	Self-test
NLE/M3/ISO-U	1	ISO-UP	Manual-test
NLE/STM3/ISO-U	1	ISO UP	Self-test
ADDRESSABLE			
NLE/DAM3	1	EURO	DALI Addressable
NLE/DAM3/ISO-U	1	ISO-UP	DALI Addressable
NLE/HS/DAM3	1	EURO	HubSense Addressable (Wireless)
NLE/HS/DAM3/ISO-U	1	ISO UP	HubSense Addressable (Wireless)

## Legends

ORDER CODE	LEGEND
NLE/LE/DOWN	EURO
NLE/LE/LEFT	EURO
NLE/LE/RIGHT	EURO
NLE/LE/UP	EURO
NLE/ISO/LE/DOWN	ISO
NLE/ISO/LE/LEFT	ISO
NLE/ISO/LE/RIGHT	ISO
NLE/ISO/LE/UP	ISO