

LINCOLN

A TP(a) rated, feature-rich fitting offering an alternative aesthetic to more common 600x600 panels



STANDARD OR SELF-TEST EMERGENCY CONVERSION PACK WITH LITHIUM (LiFePO₄) BATTERY - SEE PAGE 69



APPLICATIONS

- General commercial use

CONSTRUCTION

- Aluminium/steel construction
- Painted white RAL9016 finish
- TP(a) rated micro-prismatic controller for UGR<19 compliant lighting schemes
- Supplied complete with loop-in / loop-out connection block for quick installation
- For 15-24mm exposed T ceilings

TECHNICAL DETAILS

- 150 lm/W
- Available in 3 wattages
 - 18.3W, 2,130 lm, 116 l.lm/c.W (Suffix LO)
 - 27.5W, 3,200 lm, 116 l.lm/c.W
 - 34.8W, 3,830 lm, 110 l.lm/c.W (Suffix HO)
- CRI >80
- CCT 4000K
- Branded ENEC approved, flicker free, remote mounted LED driver


OPTIONS

EMERGENCY Plug-in lithium emergency conversion packs. To be ordered separately, as listed below

SPECIALIST EMERGENCY DALI Addressable Emergency (Suffix DAM3) options available

DIMMING DD (DALI or Switch Dim) or CF (Corridor Function) available. Add suffix DD or CF as required

SMART WIRELESS lighting control and addressable test options are available. See pages 100-103 or contact our technical team for details

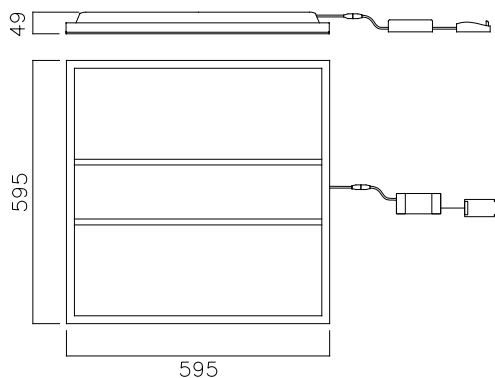

ORDER CODE	DESCRIPTION
NLN/66/840	Lincoln LED UGR<19 TP(a) Recessed Modular 600x600 840
NLN/66/LO/840	Lincoln LED UGR<19 TP(a) Recessed Modular 600x600 LO 840
NLN/66/HO/840	Lincoln LED UGR<19 TP(a) Recessed Modular 600x600 HO 840
ACCESSORIES	
N/REC/M3/PACK/V2	M3 Pack V2 LiFePO ₄ for Recessed Product Ranges
N/REC/STM3/PACK/V2	M3 Pack V2 Self-Test LiFePO ₄ for Recessed Product Ranges