


# LYNX

Premium IP66 aluminium diecast asymmetric floodlight

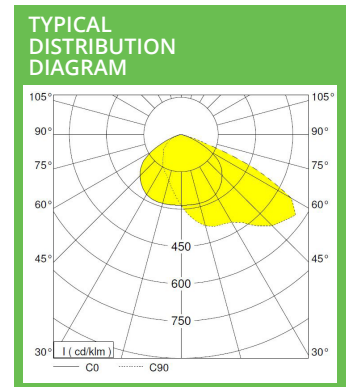

### APPLICATIONS


- Fascias, building facades, sports facilities, industrial premises, area floodlighting, perimeter and security lighting

### CONSTRUCTION

- All variants IP66 rated
- Aluminium die-cast body enclosure
- 4mm toughened glass front panel.
- Castings & bracket painted black, fine sand texture finish (RAL9017)
- Pre-wired with 1.5m H05RN-F 3x1mm<sup>2</sup> flex
- Easy to install

### TECHNICAL DETAILS

- Asymmetric lens
- 185 lm/W
- Available in five wattages:
  - 50W, 6,860 lm at 54W, 127 l.lm/cW
  - 100W, 13,970 lm at 104W, 135 l.lm/cW
  - 150W, 19,810 lm at 147W, 135 l.lm/cW
  - 200W, 26,640 lm at 206W, 129 l.lm/cW
  - 300W, 38,710 lm at 301W, 129 l.lm/cW
- CRI>70
- CCT 4000K
- PE cell versions available for dusk to dawn switching. Suffix PE1 as listed (not available on 50W version)

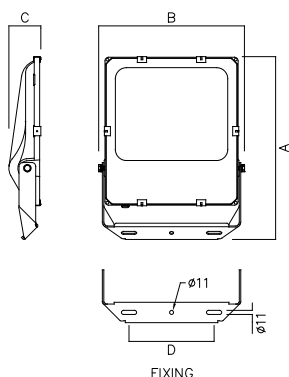

SIZE	A	B	C	D
50W	314	240	63	100-140
100W	418	330	77	130-190
150W	451	330	77	130-190
200W	494	395	87	200-260
300W	567	465	97	200-280

ORDER CODE	DESCRIPTION	WEIGHT kg	WINDAGE m <sup>2</sup>	
NLX50/740	Lynx 50W IP66 LED Asymmetric Floodlight 740	2.6	0.05	
NLX100/740	Lynx 100W IP66 LED Asymmetric Floodlight 740	4.2	0.10	
NLX150/740	Lynx 150W IP66 LED Asymmetric Floodlight 740	4.9	0.11	
NLX200/740	Lynx 200W IP66 LED Asymmetric Floodlight 740	6.5	0.14	
NLX300/740	Lynx 300W IP66 LED Asymmetric Floodlight 740	9.8	0.20	
ORDER CODE	DESCRIPTION	WITH PE CELL	WEIGHT kg	WINDAGE m <sup>2</sup>
NLX100/PE1/740	Lynx 100W IP65 LED Asymmetric Floodlight PE1 740		4.2	0.10
NLX150/PE1/740	Lynx 150W IP65 LED Asymmetric Floodlight PE1 740		4.9	0.11
NLX200/PE1/740	Lynx 200W IP65 LED Asymmetric Floodlight PE1 740		6.5	0.14
NLX300/PE1/740	Lynx 300W IP66 LED Asymmetric Floodlight PE1 740		9.8	0.20