

MAUI NEW

IP44 CCT selectable recessed downlight with opal diffuser in 3 sizes



APPLICATIONS

- Corridors and communal areas
- Changing rooms and toilets

SPECIFICATION

- Die-cast aluminium body and bezel, painted white (RAL9016)
- Polycarbonate opal diffuser, TP(a) rated
- Back-lit design, with LEDs on a metal core PCB, screw fixed to the aluminium body for excellent heat dissipation
- 110° beam angle
- Remote driver with plug / socket connector for easy installation and (optional) emergency conversion
- 3-way CCT selector switch for 3000K, 4000K and 6000K
- Connector box with 3-pole loop-in / loop-out 1.5mm² piano key terminal block


OPTIONS

Wattage and cut-out:

- 8W, 108mm cut-out
- 11W, 155mm cut-out
- 13W, 205mm cut-out

Emergency


For M3 and self-test, order the emergency conversion packs required from the list below

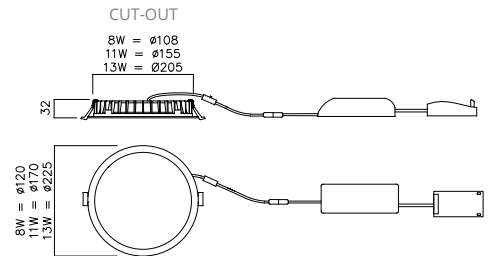

EMERGENCY CONVERSION PACKS AVAILABLE SEPARATELY SEE BELOW



REMOTE MOUNTED OSRAM OR TRIDONIC DRIVER



ORDER CODE	DIMENSIONS (mm)		POWER (W)	LUMENS (lm)	EFFICACY (lm/c.W)	DIMMING	CCT (K)
	DIAMETER	CUT-OUT					
NMU8/830-40-60	120	108	8	880	106	>80	3000 / 4000 / 6000
NMU11/830-40-60	170	155	11	1243	108	>80	3000 / 4000 / 6000
NMU13/830-40-60	225	205	13	1422	107	>80	3000 / 4000 / 6000

Emergency conversion packs

ORDER CODE	DESCRIPTION
N/REC/M3/PACK/V2	M3 Pack V2 LiFePO4 For Recessed Product Ranges
N/REC/STM3/PACK/V2	M3 Pack V2 LiFePO4 Self Test For Recessed Product Ranges