


MERCURY

IP65, fire-rated integrated LED downlight

NEW FEATURE
NOW WITH **4 POLE**
TERMINAL BLOCK



CCT SELECTION SWITCH UNDER BEZEL – ACCESSIBLE FROM THE FRONT

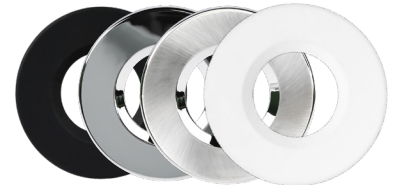

BLACK / CHROME / SATIN-CHROME / WHITE
CHOICE OF BEZELS AVAILABLE

APPLICATIONS




- Care homes
- Student accommodation
- Residential projects

SPECIFICATION

- Steel body
- Supplied with white twist & lock polycarbonate bezel
- Supplied with LEDs and driver
- Fire rated – 30, 60 & 90 minutes
- CCT selectable – 3000K, 4000K or 6000K
- Aluminium reflector giving 40° beam angle

OPTIONS

- Bezel finishes**
- Supplied with a white bezel
 - Alternative bezels in black, chrome and satin chrome available in packs of 10
- Single or multi-packs**
- Available singly or in packs of 10 to reduce waste disposal costs



KEY FEATURES

- FIRE RATED** – Certified to 30, 60 & 90 minutes
- CCT SELECTABLE** – Choice of 3000K, 4000K & 6000K via front mounted switch
- 4th POLE** – Extra pole on terminal block to allow parking of unswitched live
- SUSTAINABLE** – Trade pack of 10 to reduce packaging waste

Single

ORDER CODE SINGLE	DIMENSIONS (mm)			BODY COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.w)	CRI	CCT (K)	IP RATING
	DIAMETER	CUT-OUT	HEIGHT							
NMR/MD/WH/4P/830-40-60	86	68	36	WHITE	6	662 / 765 / 687	up to 130	>80	3000-4000-6000K	IP65

Pack of 10

ORDER CODE PACK OF 10	DIMENSIONS (mm)			BODY COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.w)	CRI	CCT (K)	IP RATING
	DIAMETER	CUT-OUT	HEIGHT							
NMR/MD/WH/4P/830-40-60/10	86	68	36	WHITE	6	662 / 765 / 687	up to 130	>80	3000-4000-6000K	IP65

Bezels

ORDER CODE	DIAMETER (mm)	BODY COLOUR	PACK QUANTITY
NMR/BK/RO/BEZEL/10	85	BLACK	10
NMR/CH/RO/BEZEL/10	85	CHROME	10
NMR/SCH/RO/BEZEL/10	85	SATIN CHROME	10