

YALE PRO

UPGRADED AND IMPROVED

A robust, low glare, multi-wattage fitting for surface or suspended use



PRO FEATURES

UGR<19

Opal micro-prismatic controller giving compliance in lighting design schemes

POWER SELECTABLE

Choice of 4 different outputs in each size for flexibility

HIGHER EFFICACY

Now up to 130 luminaire lumens per circuit watt

EMERGENCY SOLUTIONS

Using lithium iron phosphate (LiFePO₄) batteries, also covered by the 7-year warranty

EASY INSTALLATION

Using new 2-part sliding endcap design, quick release gear tray & piano key terminal block



APPLICATIONS

- Corridors and public areas in schools, colleges and public sector buildings
- For surface or suspended installation

CONSTRUCTION


- Steel body, powder coat painted in white RAL9016, with besa fixing points
- Opal PC micro-prismatic controller, for UGR<19 compliant lighting schemes
- 2-part PC endcap in white RAL9016, with securing screw with drill out points for end conduit entry
- LEDs on metal core PCB, mounted on quick release steel gear tray
- Piano key terminal block for speed of wiring install & loop in / loop out wiring

TECHNICAL DETAILS

- 180 lm/W
- 3 sizes available
 - 4Ft - 20-35W, 2600-4455, 127-130l.m/cW
 - 5Ft - 27-44W, 3673-5710, 133-137l.m/cW
 - 6Ft - 36-58W, 5078-7648, 132-137l.m/cW
- CRI >80
- CCT 4000K
- 12% uplight, 88% downlight
- Branded ENEC approved flicker free driver
- Emergency maintained 3 hrs versions (suffix M3L) available as listed

OPTIONS

- SPECIALIST EMERGENCY** Self-Test Emergency (Suffix STM3L) or DALI Addressable Emergency (Suffix DAM3) options available.
- DIMMING** DD (DALI or Switch Dim) or CF (Corridor Function) available. Add suffix DD or CF as required.
- SENSORS** Available with microwave sensor fitted to gear tray. Add suffix MW.
- ACCESSORIES** Wire suspension kits available to be ordered as separate items as listed.

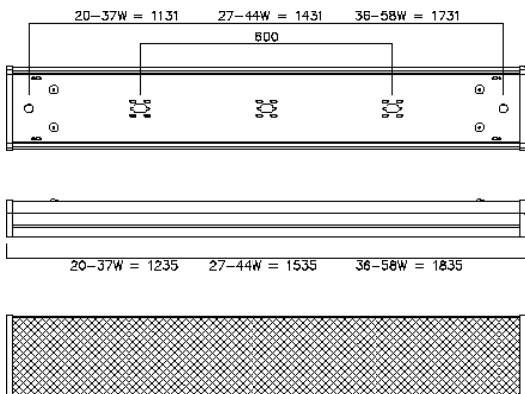

ORDER CODE	DESCRIPTION
NYA/4/20-37/840	Yale PRO 20-37W LED 4Ft Surface Mount 840
NYA/4/20-37/M3L/840	Yale PRO 20-37W LED 4Ft Surface Mount M3 Lithium 840
NYA/5/27-44/840	Yale PRO 27-44W LED 5Ft Surface Mount 840
NYA/5/27-44/M3L/840	Yale PRO 27-44W LED 5Ft Surface Mount M3 Lithium 840
NYA/6/36-58/840	Yale PRO 36-58W LED 6Ft Surface Mount 840
NYA/6/36-58/M3L/840	Yale PRO 36-58W LED 6Ft Surface Mount M3 Lithium 840
ACCESSORIES	
NYA/WIRE/SUSP/KIT	Yale Wire Suspension Kit 1.5m