

PASCO

IP65, CCT and power selectable bulkhead



APPLICATIONS


- For interior use in corridors, toilets and changing rooms

CONSTRUCTION


- Polycarbonate base and bezel
- Opal polycarbonate diffuser
- Selectable wattage: 9W, 14W, 18W
- Selectable CCT: 3000K, 4000K, 6500K

OPTIONS

- **Emergency** – all maintained 3 hours with (LiFePO4) lithium batteries
- M3L: Manual test

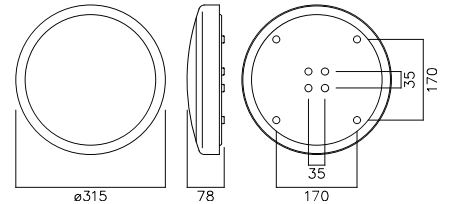

MULTI-CCT SELECTABLE
3000K / 4000K / 6500K

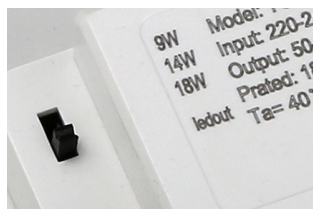

WATTAGE SELECTABLE
9W / 14W / 18W



MW SENSOR

Standard and manual test emergency (M3L)

| ORDER CODE | DIAMETER | POWER (W) | LUMENS (lm) | EFFICACY (Lm/c.W) | SENSOR TYPE | EMERGENCY | CRI | CCT (K) |
|-------------------------|----------|-------------|-------------------------------------|-------------------|-------------|-----------|-----|-----------------|
| STANDARD | | | | | | | | |
| NPC/WH/830-40-65 | 315 | 9 / 14 / 18 | (9W) 1057 / (14W) 1518 / (18W) 1858 | 119 / 113 / 111 | | | >80 | 4000-5000-6500K |
| NPC/WH/M3L/830-40-65 | 315 | 9 / 14 / 18 | (9W) 1057 / (14W) 1518 / (18W) 1858 | 119 / 113 / 111 | | M3L | >80 | 4000-5000-6500K |
| MICROWAVE | | | | | | | | |
| NPC/WH/MW/830-40-65 | 315 | 9 / 14 / 18 | (9W) 1057 / (14W) 1518 / (18W) 1858 | 119 / 113 / 111 | Microwave | | >80 | 4000-5000-6500K |
| NPC/WH/MW/M3L/830-40-65 | 315 | 9 / 14 / 18 | (9W) 1057 / (14W) 1518 / (18W) 1858 | 119 / 113 / 111 | Microwave | M3L | >80 | 4000-5000-6500K |

* RESULTS @ 4000K