

# PASCO

IP65, CCT and power selectable bulkhead



**APPLICATIONS**

- For interior use in corridors, toilets and changing rooms

**SPECIFICATION**

- Polycarbonate base and bezel
- Opal polycarbonate diffuser
- Selectable wattage: 9W, 14W, 18W
- Selectable CCT: 3000K, 4000K, 6500K


**OPTIONS**

**Emergency** – maintained 3 hours with lithium (LiFePO4) batteries


- M3L: Manual test

**Sensor**

- MW: Microwave sensor fitted to the gear tray

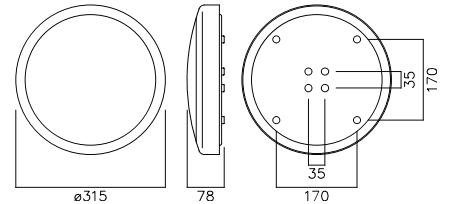


MULTI-CCT SELECTABLE  
3000K / 4000K / 6500K

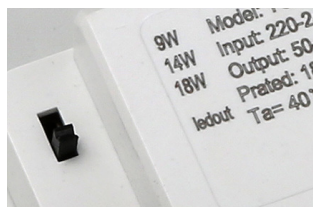

WATTAGE SELECTABLE  
9W / 14W / 18W



MW SENSOR



## Standard and manual test emergency (M3L)

ORDER CODE	DIAMETER (mm)	POWER (W)	LUMENS (lm)	EFFICACY (Lm/c.W)	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
<b>STANDARD</b>								
NPC/WH/830-40-65	315	9 / 14 / 17	1057 / 1658 / 1858	119 / 127 / 111			>80	3000 / 4000 / 6500
NPC/WH/M3L/830-40-65	315	9 / 14 / 17	1057 / 1658 / 1858	119 / 127 / 111		M3L	>80	3000 / 4000 / 6500
<b>MICROWAVE</b>								
NPC/WH/MW/830-40-65	315	9 / 14 / 17	1057 / 1658 / 1858	119 / 127 / 111	Microwave		>80	3000 / 4000 / 6500
NPC/WH/MW/M3L/830-40-65	315	9 / 14 / 17	1057 / 1658 / 1858	119 / 127 / 111	Microwave	M3L	>80	3000 / 4000 / 6500