

PORTLAND

CCT selectable IP54 bulkhead fitting



APPLICATIONS

- For commercial interior use in corridors, toilets and changing rooms

SPECIFICATION

- White polycarbonate base and white (WH) or chrome (CH) bezel
- Opal polycarbonate diffuser
- Selectable CCT: 4000K, 5000K

OPTIONS

Wattages

- 15W or 18W

Sensor

- **MW:** Microwave sensor fitted to the gear tray

Emergency – all maintained 3 hours with lithium (LiFePO₄) batteries



- M3: Manual test
- STM3: Self-test
- CSDAM3: Casambi addressable test
- HSDAM3: HubSense addressable test
- DAM3: DALI addressable test

Dimming


- DD: Digital Dimming - DALI and Switch Dim
- CF: Corridor Function – dim-to-10%
- CS: Casambi smart wireless control
- HS: HubSense smart wireless control

Replacement gear trays


Available in standard and emergency (M3L) variants, driver included, as listed opposite

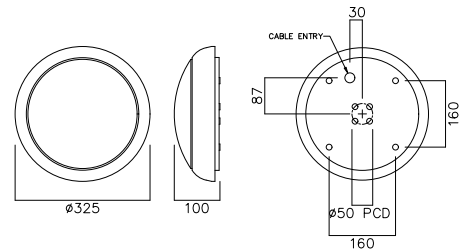

CCT SELECTABLE
4000K/5000K



AVAILABLE WITH MICROWAVE
SENSOR FITTED

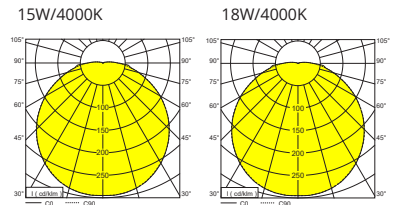

KEY FEATURES

ROBUST – Robust polycarbonate body and diffuser, IK08 rated

CCT SELECTABLE – Choice of 4000K & 5000K via slider switch on gear tray

VERSATILE – Choice of wattages, sensor and dimming make PORTLAND suitable for many projects

SUSTAINABILITY – Replaceable gear trays to extend the life of an installation

SMART WIRELESS CONTROLS



CASAMBI

PORTLAND can be supplied with either **HubSense** or **Casambi** smart wireless control built-in.

Casambi and **HubSense** use Bluetooth wireless technology to provide comprehensive lighting control, including scene setting, energy saving and addressable emergency testing.

Contact our technical team for details – technical@nvcuk.com


PORTLAND

15W, with microwave sensors and manual test emergency (M3)

ORDER CODE	DIAMETER (mm)	BEZEL COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	DIMMING	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
STANDARD										
NPO15/WH/O/840-850	325	White	15	1739	104				>80	4000 / 5000
NPO15/WH/M3/840-850	325	White	15	1739	104			M3	>80	4000 / 5000
NPO15/WH/STM3/840-850	325	White	15	1739	104			STM3	>80	4000 / 5000
NPO15/CH/O/840-850	325	Chrome	15	1739	104				>80	4000 / 5000
NPO15/CH/M3/840-850	325	Chrome	15	1739	104			M3	>80	4000 / 5000
MICROWAVE										
NPO15/WH/O/MW/840-850	325	White	15	1739	104		Microwave		>80	4000 / 5000
NPO15/WH/MW/M3/840-850	325	White	15	1739	104		Microwave	M3	>80	4000 / 5000
CORRIDOR FUNCTION MICROWAVE										
NPO15/CF/MW/WH/O/840-850	325	White	15	1739	104	Corridor Function	Microwave		>80	4000 / 5000
NPO15/WH/CFMW/M3/840-850	325	White	15	1739	104	Corridor Function	Microwave	M3	>80	4000 / 5000

18W, with microwave sensors and manual test emergency (M3)

ORDER CODE	DIAMETER (mm)	BEZEL COLOUR	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	DIMMING	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
STANDARD										
NPO18/WH/O/840-850	325	White	17	1947	116				>80	4000 / 5000
NPO18/WH/M3/840-850	325	White	17	1947	116			M3	>80	4000 / 5000
MICROWAVE										
NPO18/WH/O/MW/840-850	325	White	17	1947	116		Microwave		>80	4000 / 5000
NPO18/WH/MW/M3/840-850	325	White	17	1947	116		Microwave	M3	>80	4000 / 5000
CORRIDOR FUNCTION MICROWAVE										
NPO18/WH/CFMW/840-850	325	White	17	1947	116	Corridor Function	Microwave		>80	4000 / 5000
NPO18/WH/CFMW/M3/840-850	325	White	17	1947	116	Corridor Function	Microwave	M3	>80	4000 / 5000

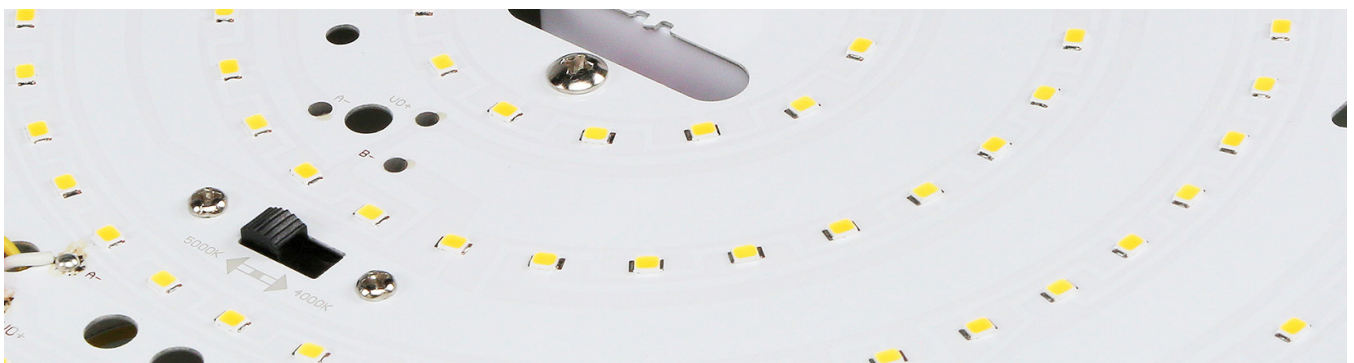

REPLACEMENT GEAR TRAYS AVAILABLE

To extend the life of a PORTLAND installation, or to upgrade it to the latest and most efficient LED technology, replacement gear trays are available.

ORDER CODE	DESCRIPTION
NGT15/CIR/840-850	Gear Tray 15W LED Circular 840-850 With Driver
NGT15/M3L/840-850	Gear Tray 15W LED Circular M3 Lithium 840-850 With Driver

