

REBUS

IP65 rated aluminium bollard



APPLICATIONS

- For commercial exterior use on paths, walkways and the approaches to a building

SPECIFICATION



- Extruded aluminium body, pretreated and painted matt black (RAL9005)
- Die-cast aluminium head unit with clear PC cover, LEDs, driver and aluminium reflector
- Head unit pre-wired with 300mm flex and IP65 connector
- Cast aluminium base plate with fixing holes
- IP65 and IK08 rated

OPTIONS

MOUNTING ACCESSORIES

Can be installed using either of two mounting accessories, to be ordered separately:

- Root mounting kit
- J-bolt kit

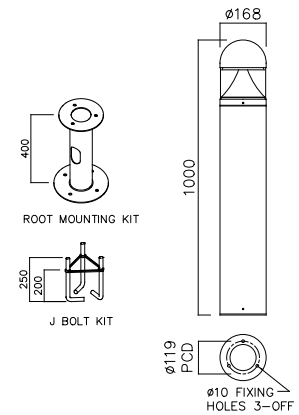

ORDER CODE	POWER	LUMENS (lm)	EFFICACY (l.m/c.w)	CRI	CCT (K)
NRB25/LED/BK/740	26	2220	85	>70	4000

Accessories

ORDER CODE	DESCRIPTION
NRB/JBOLTKIT/12	REBUS J BOLT KIT 12 INCH
NRB/RMKIT	REBUS ROOT MOUNTING KIT