

SENECA LiFe (Surface)

Surface mounted non-maintained emergency downlights



WITH WIDE LENS

WITH OVAL LENS



IP65 RATED SENECA SURFACE
AVAILABLE IN BLACK



SENECA SURFACE COMES WITH BOTH
WIDE AND OVAL LENSES WHICH TWIST
AND LOCK IN POSITION

APPLICATIONS

- Open areas and escape routes

SPECIFICATION


- Polycarbonate body
- Manual & self-test versions available in black (BK) or white, each supplied with 2 acrylic lenses as standard:
 - Wide, giving a circular light distribution - suitable for open areas
 - Oval, giving an oval light distribution - suitable for escape routes
- DALI addressable versions available.
- Lithium batteries included
- Designed to operate from 0°C to 40°C

OPTIONS



Test methods

- NM3: Manual test
- STNM3: Self-test
- HSDA/NM3: HubSense addressable test
- CSDA/NM3: Casambi addressable test
- DA/NM3: DALI addressable test

WIDE VERSION
Light distribution with wide lens for open areas.



OVAL VERSION
Light distribution with oval lens for corridors.

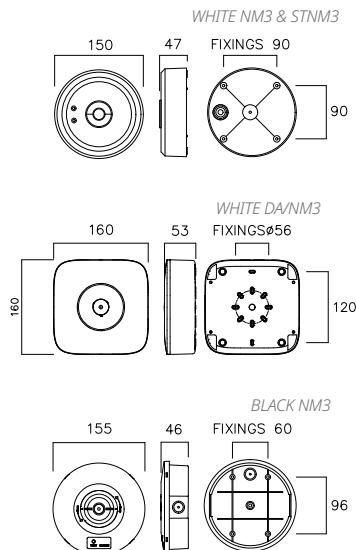

KEY FEATURES

7-YEAR WARRANTY – Including the batteries

TEST OPTIONS – Manual test, self-test, DALI addressable

VERSATILE – Choice of lenses supplied for wide or oval distribution

HIGH AMBIENT OPERATING TEMPERATURE – Up to 40°C

ORDER CODE	BODY COLOUR	MOUNTING	POWER	LUMENS (lm)	OPTICAL DIRECTION	EMERGENCY
NSC/SURF/NM3	White	Surface	2	217	Wide and oval	Manual-test
NSC/SURF/STNM3	White	Surface	2	217	Wide and oval	Self-test
ADDRESSABLE						
NSC/SURF-W/DA/NM3	White	Surface	1.3	200	Wide	DALI addressable
NSC/SURF-O/DA/NM3	White	Surface	1.3	200	Oval	DALI addressable
BLACK IP65						
NSC/BK/IP65/SURF/RD/NM3	Black	Surface	2	270	Wide and oval	Manual-test

SMART WIRELESS CONTROLS



CASAMBI

Contact our technical team for details
technical@nvcuk.com