

# SPARTAN

CCT selectable IP65 and IK10 rated polycarbonate bulkhead fitting



OPTIONAL SNAP-ON PLAIN OR EYELID BEZELS  
WHITE OR BLACK AVAILABLE SEPARATELY

### APPLICATIONS

- For commercial interior and exterior use in corridors, walkways, entrances and building perimeters

### SPECIFICATION

- Polycarbonate base in black (BK) or white (WH)
- Opal polycarbonate diffuser
- IP65 and IK10 rated
- Selectable CCT: 3000K, 4000K, 5000K
- Rear cable entry

### OPTIONS

#### Wattages

- Standard 11W or 17W high output (HO)

#### Emergency – all maintained 3 hours with lithium (LiFePO<sub>4</sub>) batteries

- M3: Manual test
- STM3: Self-test

#### Dimming

- CF: Corridor Function


#### Sensor

- MW: Microwave sensor fitted to the gear tray
- PEC: Photo-Electric Cell for dusk / dawn operation, switching on at 15 lux and off at 45 lux.


#### Snap-on bezel trim – ordered separately, optional

- Plain or eyelid (ELID)
- White (WH) or black (BK)


FITTING

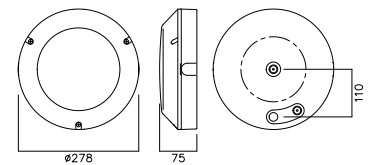


STANDARD BEZEL

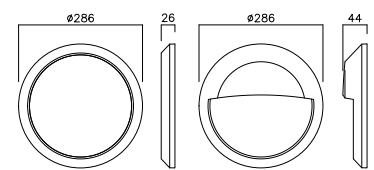


EYELID BEZEL

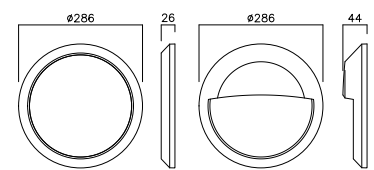


WITHOUT BEZEL



WITH STANDARD BEZEL



WITH EYELID BEZEL




Snap-on bezel (ordered separately, optional)




SPARTAN Plain Bezel - Black



SPARTAN Eyelid Bezel - Black



SPARTAN Plain Bezel - White



SPARTAN Eyelid Bezel - White

# SPARTAN

## 11W standard, manual test and self-test emergency (M3)

ORDER CODE	DIAMETER (mm)	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	DIMMING	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
<b>STANDARD</b>									
NSP/WH/830-40-50	278	9	1265	139				>80	3000 / 4000 / 5000
NSP/WH/M3/830-40-50	278	9	1265	139			M3	>80	3000 / 4000 / 5000
NSP/BK/830-40-50	278	9	1265	139				>80	3000 / 4000 / 5000
NSP/BK/M3/830-40-50	278	9	1265	139			M3	>80	3000 / 4000 / 5000
<b>SELF-TEST EMERGENCY</b>									
NSP/WH/STM3/830-40-50	278	9	1265	139			STM3	>80	3000 / 4000 / 5000
NSP/BK/STM3/830-40-50	278	9	1265	139			STM3	>80	3000 / 4000 / 5000
<b>MICROWAVE</b>									
NSP/WH/MW/830-40-50	278	9	1265	139		Microwave		>80	3000 / 4000 / 5000
NSP/WH/MW/M3/830-40-50	278	9	1265	139		Microwave	M3	>80	3000 / 4000 / 5000
NSP/BK/MW/830-40-50	278	9	1265	139		Microwave		>80	3000 / 4000 / 5000
NSP/BK/MW/M3/830-40-50	278	9	1265	139		Microwave	M3	>80	3000 / 4000 / 5000
<b>CORRIDOR FUNCTION MICROWAVE</b>									
NSP/WH/CFMW/830-40-50	278	9	1265	139	Corridor Function	Microwave		>80	3000 / 4000 / 5000
NSP/WH/CFMW/M3/830-40-50	278	9	1265	139	Corridor Function	Microwave	M3	>80	3000 / 4000 / 5000
<b>PHOTO-ELECTRIC CELL</b>									
NSP/WH/PEC/830-40-50	278	9	1265	139		Photo-Electric Cell		>80	3000 / 4000 / 5000
NSP/WH/PEC/M3/830-40-50	278	9	1265	139		Photo-Electric Cell	M3	>80	3000 / 4000 / 5000
NSP/BK/PEC/830-40-50	278	9	1265	139		Photo-Electric Cell		>80	3000 / 4000 / 5000
NSP/BK/PEC/M3/830-40-50	278	9	1265	139		Photo-Electric Cell	M3	>80	3000 / 4000 / 5000

## 17W high output and emergency (M3)

ORDER CODE	DIAMETER (mm)	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	DIMMING	SENSOR TYPE	EMERGENCY	CRI	CCT (K)
<b>STANDARD</b>									
NSP/WH/HO/830-40-50	278	17	2186	130				>80	3000 / 4000 / 5000
NSP/WH/HO/M3/830-40-50	278	17	2186	130			M3	>80	3000 / 4000 / 5000
NSP/BK/HO/830-40-50	278	17	2186	130				>80	3000 / 4000 / 5000
NSP/BK/HO/M3/830-40-50	278	17	2186	130			M3	>80	3000 / 4000 / 5000
<b>SELF-TEST EMERGENCY</b>									
NSP/WH/HO/STM3/830-40-50	278	17	2186	130			STM3	>80	3000 / 4000 / 5000
NSP/BK/HO/STM3/830-40-50	278	17	2186	130			STM3	>80	3000 / 4000 / 5000
<b>MICROWAVE</b>									
NSP/WH/HO/MW/830-40-50	278	17	2186	130		Microwave		>80	3000 / 4000 / 5000
NSP/WH/HO/MWM3/830-40-50	278	17	2186	130		Microwave	M3	>80	3000 / 4000 / 5000
NSP/BK/HO/MW/830-40-50	278	17	2186	130		Microwave		>80	3000 / 4000 / 5000
NSP/BK/HO/MWM3/830-40-50	278	17	2186	130		Microwave	M3	>80	3000 / 4000 / 5000
<b>CORRIDOR FUNCTION MICROWAVE</b>									
NSP/WH/HO/CFMW/830-40-50	278	17	2186	130	Corridor Function	Microwave		>80	3000 / 4000 / 5000
NSP/WH/HO/CFMWM3/830-40-50	278	17	2186	130	Corridor Function	Microwave	M3	>80	3000 / 4000 / 5000
<b>PHOTO-ELECTRIC CELL</b>									
NSP/WH/HO/PEC/830-40-50	278	17	2186	130		Photo-Electric Cell		>80	3000 / 4000 / 5000
NSP/WH/HO/PECM3/830-40-50	278	17	2186	130		Photo-Electric Cell	M3	>80	3000 / 4000 / 5000
NSP/BK/HO/PEC/830-40-50	278	17	2186	130		Photo-Electric Cell		>80	3000 / 4000 / 5000
NSP/BK/HO/PECM3/830-40-50	278	17	2186	130		Photo-Electric Cell	M3	>80	3000 / 4000 / 5000

## Accessories

ORDER CODE	DESCRIPTION	DIAMETER
NSP/BK/BEZEL/3CCT	SPARTAN Plain Bezel - Black	286
NSP/BK/EYELID/3CCT	SPARTAN Eyelid Bezel - Black	286
NSP/WH/BEZEL/3CCT	SPARTAN Plain Bezel - White	286
NSP/WH/EYELID/3CCT	SPARTAN Eyelid Bezel - White	286