

SYRACUSE LiFe

A recessed non-maintained emergency downlight




APPLICATIONS

- Open areas and escape routes


SPECIFICATION

- White polycarbonate body
- Supplied with 2 lenses as standard:
 - Wide, giving a circular light distribution - suitable for open areas
 - Oval, giving an oval light distribution - suitable for escape routes
- Lithium batteries included
- Designed to operate from 0°C to 40°C

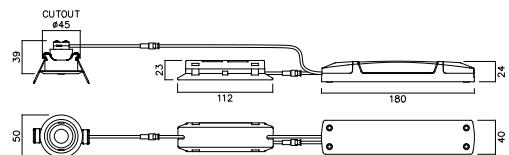


WIDE VERSION

Light distribution with wide lens for open areas.



oval version

Light distribution with oval lens for corridors.



KEY FEATURES

7-YEAR WARRANTY – Including the batteries

VERSATILE – Choice of lenses supplied for wide or oval distribution

HIGH AMBIENT OPERATING TEMPERATURE – Up to 40°C

ORDER CODE	BODY COLOUR	MOUNTING	POWER	LUMENS (lm)	OPTICAL DIRECTION	EMERGENCY
NSY1/NM3	White	Recessed	1	119	Wide / Oval	Manual-test