

WESTMINSTER

Expanded range of low glare IP54 commercial downlights.



NEW OPTION



APPLICATIONS

- Corridors and communal areas
- Changing rooms and under-canopy installations

SPECIFICATION

- Die-cast aluminium bezel, painted white (RAL9003)
- Die-cast aluminium heat-sink and body, painted black
- Semi-specular aluminium reflector
- Polycarbonate opal diffuser, TP(a) rated, deep recessed
- Remote driver with male/female connector for easy installation & maintenance
- 3-pole, loop-in / loop-out piano key terminal block
- 63° beam angle

OPTIONS

Wattages, CCT & cut-out

- Selectable 6-15W, 3000K, 150mm cut-out
- Selectable 6-15W, 4000K, 150mm cut-out
- Selectable 6-18W, 3000K, 200mm cut-out
- Selectable 6-18W, 4000K, 200mm cut-out
- Fixed 12W, 20W & 30W, 4000K, 200mm cut-out


Emergency

- For M3, self-test and DALI addressable emergency test, order the conversion pack you need from the list opposite.
- CSDAM3L: Casambi addressable test
- HSDAM3L: HubSense addressable test


Dimming

- DD: Digital Dimming - DALI and Switch Dim
- CF: Corridor Function – dim-to-10%
- CS: Casambi smart wireless control
- HS: HubSense smart wireless control

Mounting disc - available for use with WESTMINSTER 200mm cut-out, for installation in apertures up to 235mm dia. listed opposite

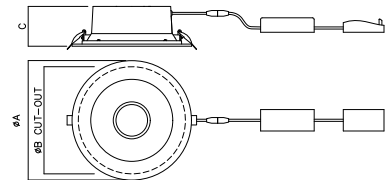

SIZE	A	B	C
6-15W	170	150	75.5
6-18W	223	200	74
12/20/30W	223	200	74



KEY FEATURES

LOW GLARE - With deep recessed diffuser

POWER SELECTABLE - Choice of wattages via dip-switch selection on driver

CCT CHOICE - 3000K or 4000K

SIZE OPTIONS - 150mm or 200mm diameter cutouts

EFFICIENT - Achieves up to 130 luminaire lumens per circuit watt

SMART WIRELESS CONTROLS



CASAMBI

WESTMINSTER can be supplied with either **HubSense** or **Casambi** smart wireless control built-in.

Casambi and **HubSense** use Bluetooth wireless technology to provide comprehensive lighting control, including scene setting, energy saving and addressable emergency testing.

Contact our technical team for details – technical@nvcuk.com

WESTMINSTER

150mm dia. cut-out, multi-wattage in 3000K and 4000K

ORDER CODE 6-15W	DIMENSIONS (mm)		POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	BEAM ANGLE	CRI	CCT (K)
	DIAMETER	CUT-OUT						
NWM6-15/830	170	150	6 / 8 / 10 / 12 / 13 / 15	754 / 987 / 1223 / 1452 / 1675 / 1903	up to 126	60°	>80	3000
NWM6-15/840	170	150	6 / 8 / 10 / 12 / 13 / 15	754 / 987 / 1223 / 1452 / 1675 / 1903	up to 126	60°	>80	4000

200mm dia. cut-out, multi-wattage in 3000K and 4000K


ORDER CODE 6-18W	DIMENSIONS (mm)		POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	BEAM ANGLE	CRI	CCT (K)
	DIAMETER	CUT-OUT						
NWM6-18/830	223	200	6 / 8 / 10 / 12 / 13 / 15 / 17 / 19	732 / 979 / 1183 / 1418 / 1642 / 1843 / 2051 / 2255	up to 122	60°	>80	3000
NWM6-18/840	223	200	6 / 8 / 10 / 12 / 13 / 15 / 17 / 19	749 / 1001 / 1236 / 1485 / 1733 / 1966 / 2164 / 2390	up to 130	60°	>80	4000

200mm dia. cut-out, single wattage in 4000K

ORDER CODE FIXED	DIMENSIONS (mm)		POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	BEAM ANGLE	CRI	CCT (K)
	DIAMETER	CUT-OUT						
NWM12/840	223	200	12	1462	121	60°	>80	4000
NWM20/840	223	200	17	2097	122	60°	>80	4000
NWM30/840	233	200	31	3466	112	60°	>80	4000

Accessories

ORDER CODE	DESCRIPTION
NWM-NWA/MOUNTING/DISC	Westminster & Washington Mounting Disc for cutouts up to 235mm dia.



Emergency conversion packs

ORDER CODE	DESCRIPTION
N/REC/M3/PACK/V2	M3 Pack V2 LiFePO4 For Recessed Product Ranges
N/REC/STM3/PACK/V2	M3 Pack V2 LiFePO4 Self Test For Recessed Product Ranges
N/REC/DAM3/PACK	LiFe DALI Addressable M3 Emergency Pack For Recessed Product Ranges



N/REC/M3/PACK/V2 and
N/REC/STM3/PACK/V2 - see page 77



N/REC/DAM3/PACK - see page 77