

BURBANK

Low glare dimmable recessed COB downlight




APPLICATIONS

- For spot and accent lighting in commercial and residential projects

CONSTRUCTION

- Die-cast aluminium bezel
- Die-cast aluminium heat sink
- Gimbal construction giving +/- 25° tilt action
- Clear polycarbonate front cover
- Specular aluminium reflector giving 36° beam angle
- COB LED with CRI>90
- Supplied with a choice of drivers joined to fitting with male/female twist-to-lock connectors.
- Driver includes 3-pole loop-in/loop-out 2.5mm² piano key terminals
- IP44 to the front face of the fitting

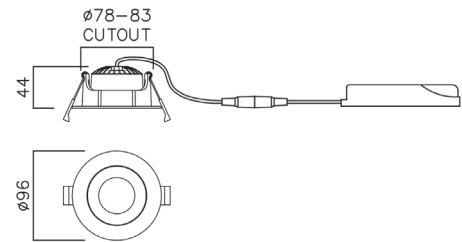

OPTIONS

- Bezel colour: Textured white (RAL9003) no suffix or matt black (RAL9005), suffix BK
- Colour temperature: Choice of 3000K or 4000K
- Driver: Choice of standard mains dimmable driver or dim-to-warm (DTW) driver (3000K at full output, 2000K when dimmed)

ORDER CODE	AVAILABILITY			POWER (W)	CCT (K)	LUMENS (lm)	EFFICACY (lm/W)	CRI (Ra)	DRIVERS PER MCB	COLOUR
	DK	FI	SE							
NBU/6/927		4266527	7474785	7	3000	599	91	>90	B10=131 B16=210 C10=230 C16=368	WHITE
NBU6/G/930		4266527	7474785	7	3000	599	91	>90	B10=131 B16=210 C10=230 C16=368	WHITE
NBU6/G/940		4266529	7474786	7	4000	630	102	>90	B10=131 B16=210 C10=230 C16=368	WHITE
NBU6/G/DTW/930-20		-	7474787	7	3000-2000	599	91	>90	B10=131 B16=210 C10=230 C16=368	WHITE
NBU6/BK/G/930		4266528	7474884	7	3000	599	91	>90	B10=131 B16=210 C10=230 C16=368	BLACK
NBU6/BK/G/940		4266530	7474885	7	4000	630	102	>90	B10=131 B16=210 C10=230 C16=368	BLANK