

# CLEVELAND

IP65 rated weatherproof fitting



### APPLICATIONS


- For use in industrial, warehouse and food preparation areas. Resistant to impact and many chemical agents, but for suitability in specific environments please take specialist advice.

### CONSTRUCTION

- Polycarbonate base and opal diffuser
- Stainless steel clips holding diffuser to base
- Suitable for surface, conduit or suspended installation. Surface mounting and suspension clips provided.
- Single and twin rows of LEDs on metal core PCB on steel gear tray
- ENEC standard driver included. PF>0.9
- IP65 cable gland supplied

### OPTIONS

- Two sizes available (4' and 5') each with a choice of 1 or 2 rows of LEDs:
  - 4': 23W or 38W (1,250mm) or
  - 5': 36W or 57W (1,550mm)

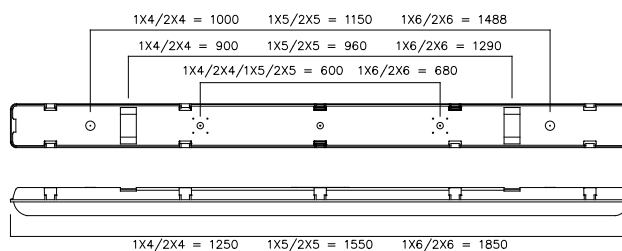

ORDER CODE	AVAILABILITY			POWER (W)	CCT (K)	LUMENS (lm)	EFFICACY (lm/W)	CRI (Ra)	DRIVERS PER MCB	COLOUR
	DK	FI	SE							
NCV1X4/840		-	-	23	4000	2,915	125	>80	B10=20 B16=30 C10=30 C16=40	GREY
NCV1X5/840		-	-	36	4000	3,935	109	>80	B10=20 B16=30 C10=30 C16=40	GREY
NCV2X4/840		4344022	-	38	4000	4,845	126	>80	B10=20 B16=30 C10=30 C16=40	GREY
NCV2X5/840		4344023	-	57	4000	6,615	116	>80	B10=12 B16=18 C10=18 C16=25	GREY