

DALLAS

Versatile surface and/or suspended fittings



APPLICATIONS


- Suitable for surface mounted application in domestic kitchens & hallways and in a wide range of commercial projects.
- Can be either surface mounted (DO versions only) or suspended

CONSTRUCTION

- Aluminium body construction, powder coat finished in white RAL9016
- UV stable opal polycarbonate diffuser or specular aluminium reflector
- LEDs on metal core PCB
- CCT selectable 3000K or 4000K
- DD dimming as standard (DALI or Switch Dim)
- All versions supplied with wire suspension kit


OPTIONS

- Choice of opal diffuser (O) or UGR<19 reflector (R)
- Light distribution Down only suffix.../DO and Up/Down (70%-30%) Suffix.../BD

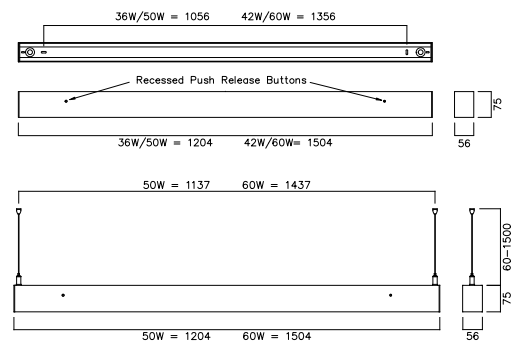


ORDER CODE DOWN ONLY	AVAILABILITY			POWER (W)	LUMENS (lm)	EFFICACY (lm/W)	CCT (K)	CRI (Ra)	DRIVERS PER MCB	COLOUR
	DK	FI	SE							
NDL36/O/DO/DD/830-840 with OPAL DIFFUSER		-	7019889	36	4,339 - 4,450	121 - 124	3000-4000	>80	B10=20 B16=40 C10=34 C16=55	WHITE
NDL42/O/DO/DD/830-840 with OPAL DIFFUSER		-	7019895	42	4,505 - 4,620	107 - 110	3000-4000	>80	B10=16 B16=30 C10=24 C16=40	WHITE
NDL36/R/DO/DD/830-840 with REFLECTOR		-	7013258	36	4,134 - 4,240	115 - 118	3000-4000	>80	B10=20 B16=40 C10=34 C16=55	WHITE
NDL42/R/DO/DD/830-840 with REFLECTOR		-	7013259	42	4,310 - 4,420	103 - 105	3000-4000	>80	B10=16 B16=30 C10=24 C16=40	WHITE

ORDER CODE BI-DIRECT	AVAILABILITY			POWER (W)	LUMENS (lm)	EFFICACY (lm/W)	CCT (K)	CRI (Ra)	DRIVERS PER MCB	COLOUR
	DK	FI	SE							
NDL50/O/BD/BD/830-840 with OPAL DIFFUSER		-	7019896	50	5,636 - 5,780	113 - 116	3000-4000	>80	B10=16 B16=30 C10=24 C16=40	WHITE
NDL60/O/BD/BD/830-840 with OPAL DIFFUSER		-	7019897	60	6,718 - 6,890	112 - 115	3000-4000	>80	B10=10 B16=18 C10=18 C16=30	WHITE
NDL50/R/BD/BD/830-840 with REFLECTOR		-	7019887	50	5,358 - 5,495	107 - 110	3000-4000	>80	B10=16 B16=30 C10=24 C16=40	WHITE
NDL60/R/BD/BD/830-840 with REFLECTOR		-	7019888	60	6,596 - 6,765	110 - 113	3000-4000	>80	B10=10 B16=18 C10=18 C16=30	WHITE

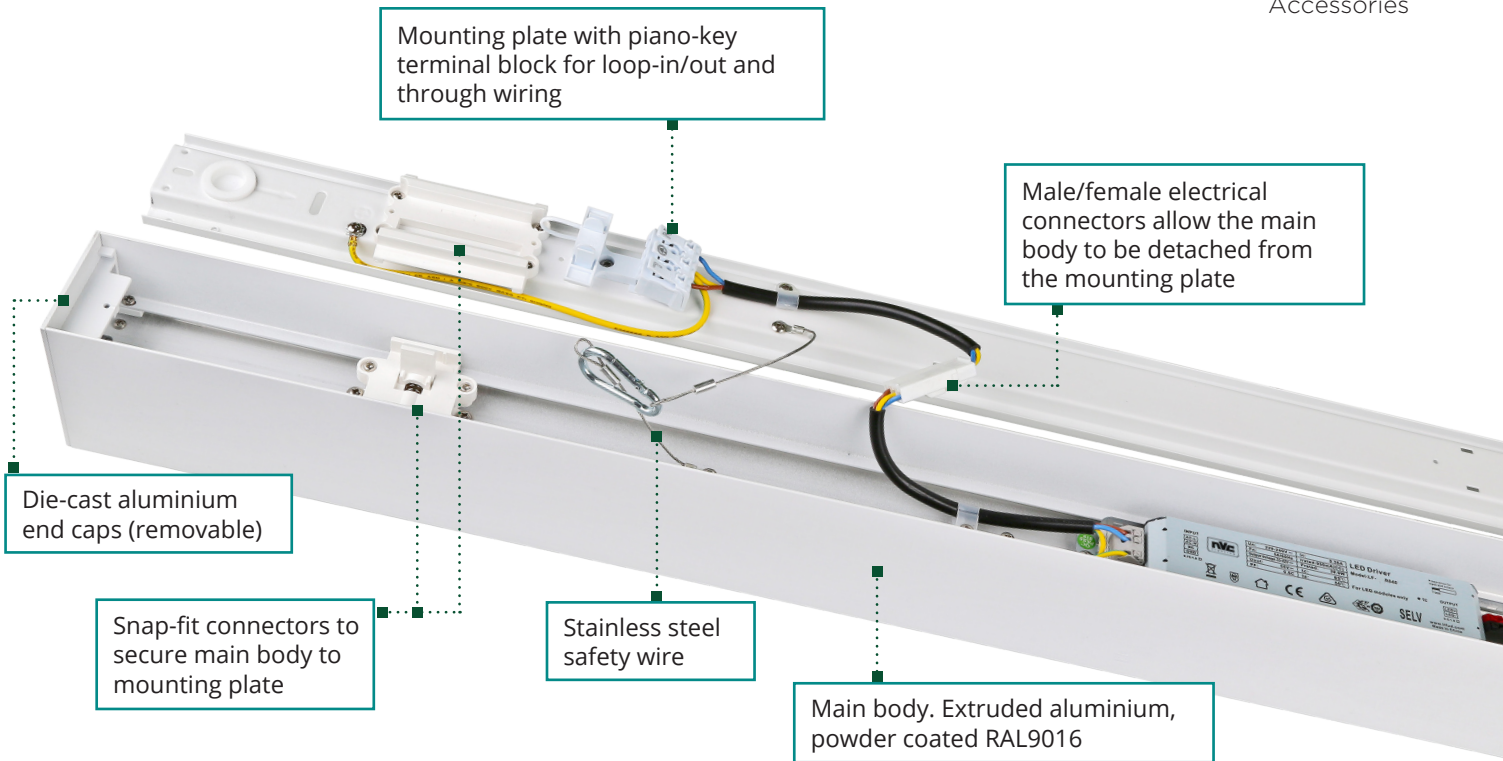


Fittings can be installed individually or as continuous runs in straight-line, L, T or X configurations and the suspended versions can deliver 100% downlight, or a mix of 70% downlight and 30% uplight.


DALLAS ACCESSORIES

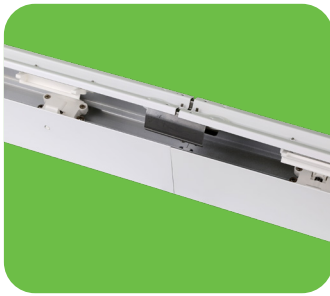


STRAIGHT COUPLING KIT



"L" COUPLING KIT



"T" COUPLING KIT

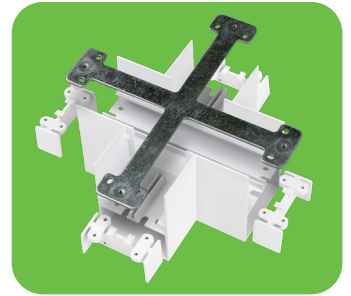

"X" COUPLING KIT

ORDER CODE	DESCRIPTION	ACCESSORIES
NDL/O/L	Dallas Opal L Joiner	
NDL/O/T	Dallas Opal T Joiner	
NDL/O/X	Dallas Opal X Joiner	
NDL/O/STRAIGHT	Dallas Opal Straight Joiner	
NDL/R/L	Dallas Reflector L Joiner	
NDL/R/T	Dallas Reflector T Joiner	
NDL/R/X	Dallas Reflector X Joiner	
NDL/R/STRAIGHT	Dallas Reflector Straight Joiner	
NDL/O/1200/BLANK/SPACER	Dallas Opal 4Ft Blank Spacer c/w Straight Coupling Kits	
NDL/O/1500/BLANK/SPACER	Dallas Opal 5Ft Blank Spacer c/w Straight Coupling Kits	
NDL/R/1200/BLANK/SPACER	Dallas Reflector 4Ft Blank Spacer + Straight Coupling Kit	
NDL/R/1500/BLANK/SPACER	Dallas Reflector 5Ft Blank Spacer + Straight Coupling Kit	
NDL/WSK	Dallas Wire Suspension Kit	

