

HARSTED

IP44 rated colour selectable and dimmable recessed downlight




APPLICATIONS

- For residential use, including in kitchens and bathrooms.

CONSTRUCTION

- Back-lit design with LEDs mounted in a die-cast aluminium heat sink, body & bezel all painted white, RAL9016
- UV stable opal polycarbonate diffuser in a die-cast aluminium bezel
- 110° beam angle - for general and ambient lighting
- Colour selectable: Selector switch allows choice of 3000K or 4000K
- Supplied with ENEC approved, mains dimmable driver, PF= \geq .95
- Push-fit male/female connectors between body and driver for easy installation and maintenance
- 3-pole loop-in / loop-out connector block (CB3P) with piano key terminals for 1,5mm² cable

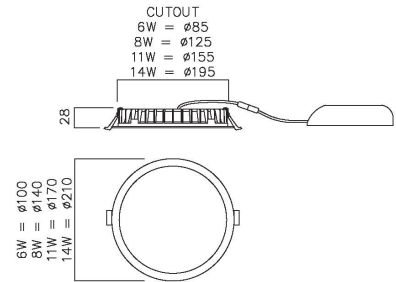

OPTIONS

- Wattages: Choice of 6W, 8W, 11W & 14W.

ORDER CODE	AVAILABILITY			POWER (W)	CCT (K)	LUMENS (lm)	EFFICACY (lm/W)	CRI (Ra)	DRIVERS PER MCB	COLOUR
	DK	FI	SE							
NHR6/MD/CB3P/830-840	-	4266507	-	6.5	3000-4000	465-480	72-74	>80	B10=50 B16=80 C10= 50 C16=80	WHITE
NHR8/MD/CB3P/830-840	-	4266508	-	8.9	3000-4000	730-750	82-84	>80	B10=50 B16=80 C10= 50 C16=80	WHITE
NHR11/MD/CB3P/830-840	-	4266509	-	11.6	3000-4000	1,020-1,050	88-91	>80	B10=30 B16=50 C10= 30 C16=50	WHITE
NHR14/MD/CB3P/830-840	-	4266510	-	13.8	3000-4000	1,225-1,260	89-91	>80	B10=30 B16=50 C10= 30 C16=50	WHITE