

HUNTSVILLE

Circular IP65 rated bulkhead fixture



APPLICATIONS


- For under-canopy and exterior use on building entrances, perimeters and paths

CONSTRUCTION

- Moulded polycarbonate body and trim, black, RAL9005
- Opal polycarbonate diffuser secured by trim and 4 stainless steel socket head screws
- Rear cable entry. Cable entry bungs supplied.
- 3-pole loop-in / loop-out piano key terminal block for 1.5mm² cable
- Driver included (PF>0.9), fixed to inside of body, with slider switch to select colour temperature - 3000K, 4000K or 5700K
- LEDs on metal core PCB screw fixed to inside of diffuser
- Male/female connector between driver (in base) and LEDs (fixed to diffuser) for easy installation

OPTIONS

- Trim: Choice of plain circular or eyelid (ELID) design

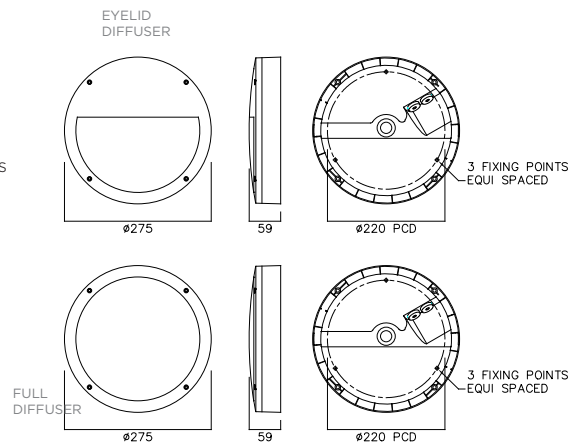

ORDER CODE	AVAILABILITY			POWER (W)	CCT (K)	LUMENS (lm) @4000K	EFFICACY (lm/W)	CRI (Ra)	DRIVERS PER MCB	COLOUR
	DK	FI	SE							
NHU12/830-840-857	✓	4544012	7704680	12	3000-4000-5700	1,344	112	>80	B10=16 B16=28 C10=16 C16=28	BLACK
NHU12/ELID/830-840-857	✓	4544013	7704681	12	3000-4000-5700	1,240	103	>80	B10=16 B16=28 C10=16 C16=28	BLACK