

# RENO

IP65 rated aluminium bollard



## APPLICATIONS


- For use on paths, in car parks and in urban amenity areas

## CONSTRUCTION

- Heavy gauge extruded aluminium body and die-cast head, painted grey, RAL9007
- Clear, UV stable polycarbonate cover
- Anodised aluminium reflector
- LEDs mounted in head unit
- Driver included (PF >.9) with incoming mains cable (300mm) terminating in IP65 in-line connector
- Robust aluminium base plate with 3x10mm fixing holes.
- A root mounting kit is required for installation - 2 sizes are available

## OPTIONS

- Root mounting kit: choice of two sizes available, as listed.

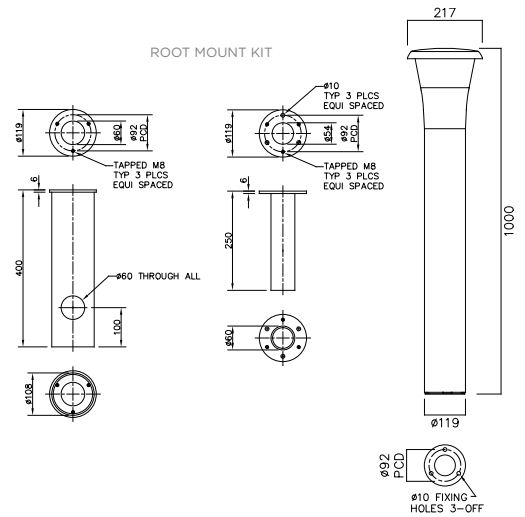

ORDER CODE	AVAILABILITY			POWER (W)	CCT (K)	LUMENS (lm)	EFFICACY (lm/W)	CRI (Ra)	DRIVERS PER MCB	COLOUR
	DK	FI	SE							
NRN/GRY/740	-	4544010	7748690	13W	4000	950	72	>70	-	GREY
NRN/RMKIT/400	-	-	7748734	-	-	-	-	-	-	-
NRN/RMKIT/250	-	4544011	-	-	-	-	-	-	-	-