NVC UK - NVC Lighting Limited NVC Park 201, Hollymoor Way, Rubery, Birmingham, B31 5HE T +44 (0)121 457 6340 E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB Albybergsringen 3b 137 69 Österhaninge T +46(0)8 735 55 40 Sweden info@nvc-lighting.se Finland info@nvclighting.fi Denmark info@nvclighting.dk



DATASHEET


ACCESSORIES

LiFe M3 Emergency Pack For Recessed Product Ranges

Plug And Play Option For A Range Of Fittings Comes Complete With Loop in / Loop Out Connections Lithium Iron Phosphate Battery LiFePO4





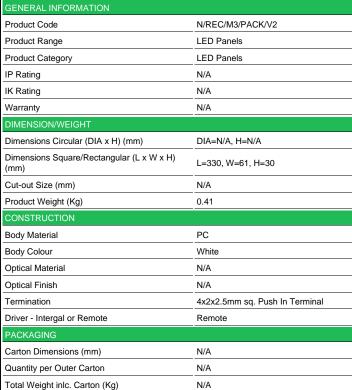



LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (Im)	N/A N/A
Power Consumption (W)	N/A N/A
	N/A
LED Lumens (lm/W) Efficacy (l.lm/c.W)	N/A N/A
	0°C to 25°C
Operating Temp. (Min/Max)	0°C t0 25°C
LIGHT SOURCE	LED
Type	LED
Correlated Colour Temp.	N/A
Colour Rendering Index (CRI)	N/A
Lumen Depreciation	N/A
SDCM	N/A
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50/60Hz
In Rush	N/A
Drivers per MCB*	N/A
Class	Class 2
Power Factor	N/A
Cable Entry	Prewired
ELECTRICAL OUTPUT	
Forward Current (mA)	35 to 100
Forward Voltage (Vf)	20 to 55
EMERGENCY DATA	
Mode of Operation	Non-Maintained
Battery Duration	3 hours
Battery Type	LiFePO4
Battery Specification	6.4V 1.5Ah
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943074118
E NUMBER	7347763
* GUIDE ONLY	

GUIDE ONLY

