NVC UK - NVC Lighting Limited
NVC Park 201, Hollymoor Way, Rubery,
Birmingham, B31 5HE
T +44 (0)121 457 6340
E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB
Albybergsringen 3b 137 69 Österhaninge
T +46(0)8 735 55 40
Sweden info@nvc-lighting.se
Finland info@nvclighting.fi
Denmark info@nvclighting.dk

DATASHEET

WESTMINSTER

Westminster 30W LED Recessed Downlight 840

IP54 Low Glare LED Recessed Downlight
White Die Cast Aluminium Bezel
Black Die Cast Aluminium Body and Heatsink

GENERAL INFORMATION	
Product Code	NWM30/840
Product Range	Downlights
Product Category	Downlights
IP Rating	54
IK Rating	N/A
Warranty	7 Years Unlimited
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=Ø223, H=74
Dimensions Square/Rectangular (L x W x H) (mm)	L=0, W=0, H=0
Cut-out Size (mm)	Ø200
Product Weight (Kg)	0
CONSTRUCTION	
Body Material	PC / Die Cast Aluminium
Body Colour	White
Optical Material	N/A
Optical Finish	N/A
Termination	N/A
Driver - Intergal or Remote	Remote
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inlc. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	E
Luminaire Lumens (lm)	3466
Power Consumption (W)	31
LED Lumens (lm/W)	165
Efficacy (l.lm/c.W)	112
Operating Temp. (Min/Max)	-20°C to 25°C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation	L80 100000
SDCM	<3
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50/60Hz
In Rush	N/A
Drivers per MCB*	N/A
Class	Class 2
Power Factor	N/A
Cable Entry	N/A
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Emergency Lumens	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943097032

* GUIDE ONLY

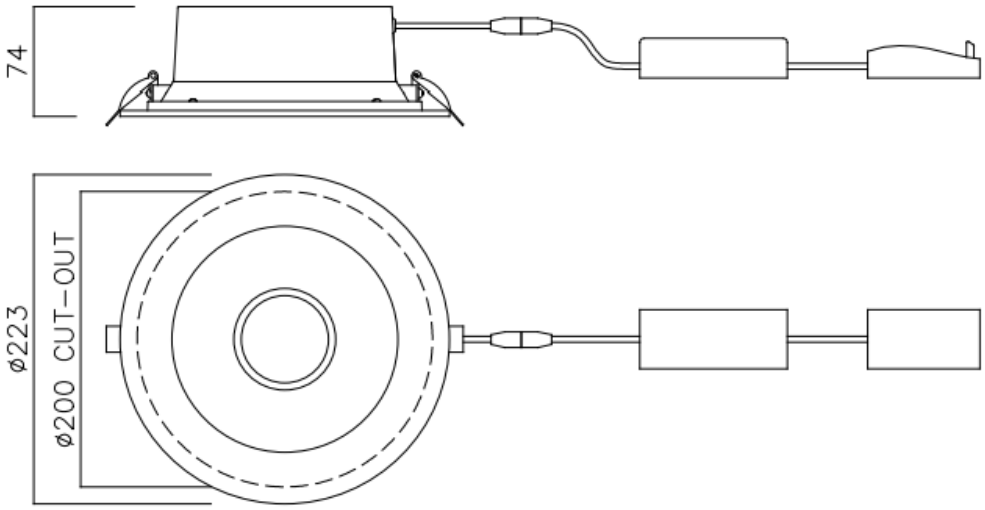

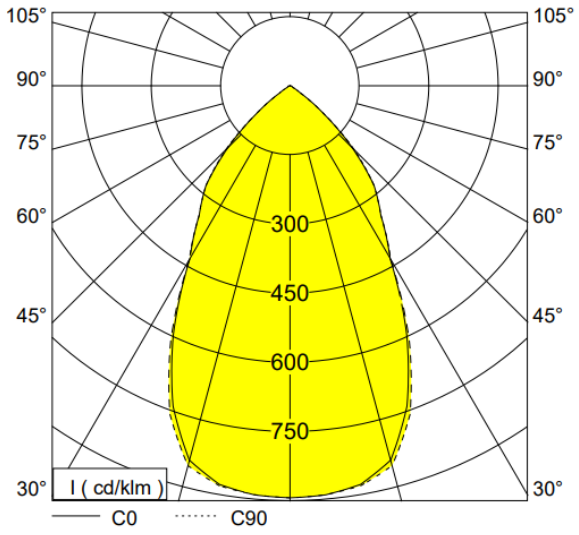

Registered in England and Wales
Registration No.: 062649
generated by NVC UK PIM v1.5